
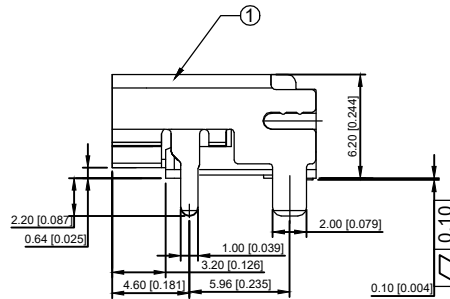


SPECIFICATIONS


1. OPERATING CURRENT: 0.5A MAX.
2. OPERATION TEMPERATURE: -25 TO +85
3. DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADJACENT TERMINAL (UNMATE)
300Volts AC BETWEEN ADJACENT TERMINAL (MATE)
4. INSULATION RESISTANCE:
100Mohm MIN (UNMATED); 10Mohm MIN. (MATED)
5. HDMI SPECIFICATION COMPLIANCE

RECOMMENDED P.C.B. LAYOUT (T:1.20~1.60mm)
TOLERANCE UNSPECIFIED ±0.05mm

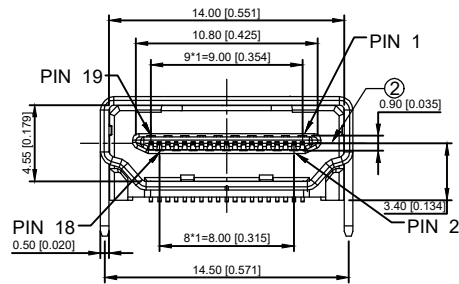

A71-05H5-1X1N1

- 1: Au 1U"
- 5: Au 15U"
- 6: Au 30U"



ROHS COMPLIANCE

3	CONTACTS	19	COPPER ALLOY, GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100u" MIN. TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	COPPER ALLOY, NICKEL PLATED

					ANGULAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE: HDMI CONNECTOR		
					L ≤ 4	±0.2	DWN	DATE	VIEW:	PART NO.: A71-05H5-1X1N1		
					4 < L ≤ 16	±0.3	CHKD	DATE	UNIT: mm/in	DWG NO.:		
					16 < L ≤ 63	±0.4	APPD	DATE	SIZE: A4	A71-05H5-1X1N1		
					L > 63	±0.5				WEIGHT	SHEET	REVISION
					UNSPECIFIED TOLERANCES		KXB INDUSTRIAL PRECISION CO., LIMITED			1.0g	1/1	A0
MARK	DESCRIPTION	DATE	REVISED	APPROVED								
REVISIONS												
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn												

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)