

RECOMMENDED P.C.B. LAYOUT (T:1.20~1.60mm)
TOLERANCE UNSPECIFIED ±0.05mm


ROHS COMPLIANCE

SPECIFICATIONS

1. OPERATING CURRENT: 0.5A MAX.
2. OPERATION TEMPERATURE: -25 TO +85
3. DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADIACENT TERMINAL (UNMATE)
300Volts AC BETWEEN ADIACENT TERMINAL (MATE)
4. INSULATION RESISTANCE:
100Mohm MIN (UNMATED); 10Mohm MIN. (MATED)
5. HDMI SPECIFICATION COMPLIANCE

A71-05H6-1X1N1

1: Au 1U"
5: Au 15U"
6: Au 30U"

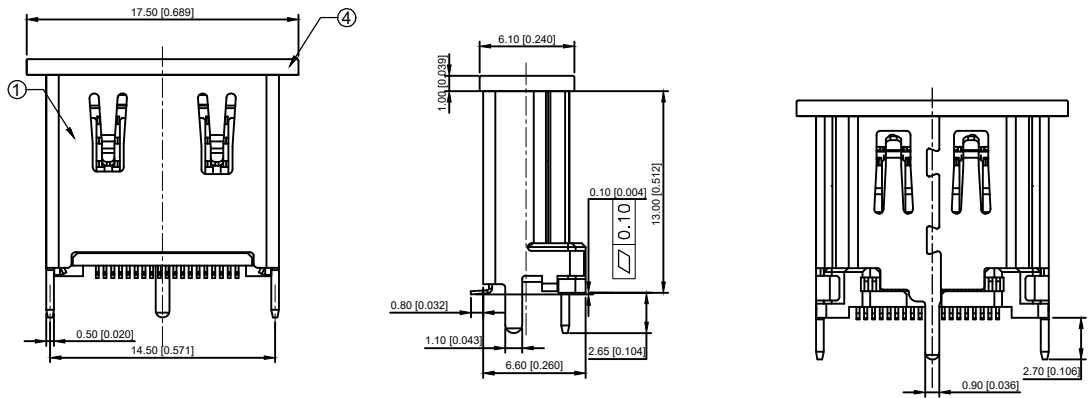

4	DUST COVER	1	THERMOPLASTIC UL94V-0
3	CONTACTS	19	COPPER ALLOY, GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100U" MIN. TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	COPPER ALLOY OR SPCC, NICKEL PLATED

					DSND	DATE	SCALE: N/A	MODEL TYPE: HDMI CONNECTOR		
					DWN	DATE	VIEW:	PART NO.: A71-05H6-1X1N1		
					CHKD	DATE	UNIT: mm/in	DWG NO.: A71-05H6-1X1N1		
					APPD	DATE	SIZE: A4			
REVISIONS					UNSPECIFIED TOLERANCES			WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					KKB INDUSTRIAL PRECISION CO., LIMITED			1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)