


Specifications :

Voltage rating: 250V AC / DC
 Current rating: 5A AC / DC
 Withstanding voltage: 1000V AC/minute
 Temperature range: -40°C~+85°C
 Insulation resistance: ≥1000MΩ
 Contact resistance: ≤10mΩ
 After environmental testing: ≤20mΩ

C3030 T F-P XX X-X

- ① Series Number
- ② Category: T-terminal
- ③ Shape: F-Female Terminal
- ④ Material: P-Phosphorbronze
- ⑤ Plating style:
 G-Gold-Plated Contact
 *01-Gold Flash *15-15u" *30-30u"
 SN-Bright tin plating 70-120u"
- ⑥ Plating method:
 Blank-Stamping before plating
- ⑦ Mold No./Mark/Special No.

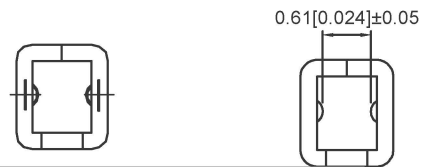

C3030TF-PG30	Phosphor Bronze	AWG#20-24	1.85 mm (Max)	Stamping Before Pating:30~50u" Ni;Contact Area Gold:30u" Min.	X3030HM
C3030TF-PG15				Stamping Before Pating:30~50u" Ni;Contact Area Gold:15u" Min.	
C3030TF-PG01				Stamping Before Pating:30~50u" Ni;Contact Area Gold Flash	
C3030TF-PSN				Stamping Before Pating:30~50u" Ni;70~120u"Sn	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used in XKB Housing

广东星坤科技股份有限公司

DETAIL C
SCALE: 1:1

生	日期	units: mm	DSND	DATE	SCALE: N/A	MODEL TYPE: Wire to board connector
ΔX	日期	tolerance: X.X ±0.2mm	DWN	DATE	VIEW:	PART NO.: 3.00 mm Crimp Style Connectors
ΔX	日期	X.XX ±0.1mm	CHKD	DATE	UNIT: mm/in	DWG NO.: C3030TF-PXXX
ΔX	日期	X.XXX ±0.05mm	APPD	DATE	SIZE: A4	WEIGHT · SHEET · REVISION 1.0g · 1/1 · A0
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	XKB INDUSTRIAL PRECISION CO., LIMITED

文件工程章

REVISIONS
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)