



PCB LAYOUT TOP VIEW
TOLERANCES: ±0.05

NOTES:

- 注释:
 1. CONTACT CURRENT RATING: 1A.
 触点额定电流: 1A.
 2. CONTACT RESISTANCE: 50MQ MAX.;
 接触电阻: 最大 50MQ.
 3. INSULATION RESISTANCE: 100MQ MIN.
 绝缘电阻: 100MQMIN.
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 耐介质: 最小 500V AC.
 5. DURABILITY: 5,000 CYCLES MIN.
 耐久性: 每分钟 5000 次循环.
 6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
 连接器配合力: 最大 29.4N (3.00Kgf) ..
 7. CONNECTOR UNMATING FORCES: 4.94N (0.50Kgf) MIN.;
 连接器脱离力: 最小 4.94N (0.50Kgf) ..

	MATERIAL	PLATING
center pin	Brass	tin
terminal 1	Brass	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
plastic	Pbt	

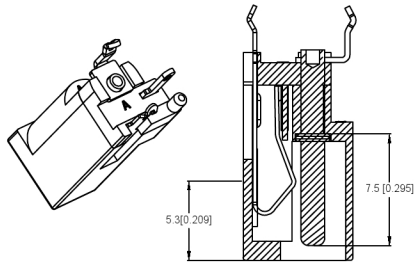

SCHEMATIC	
	1
	2
	3
Center Pin	
	Ø1.0 mm
	Ø1.3 mm
	Ø1.65 mm

Ø3.5 [0.138]

广东圣坤科技股份有限公司

生效	日期
文件工程章	REVISIONS
MARK	DESCRIPTION
DATE	REVISED
DATE	APPROVED
DATE	UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: DC POWER JACK
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	DC-002H-2.5A-1.65
			WEIGHT SHEET REVISION
			1.0g 1/1 A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)