



SECTION A-A

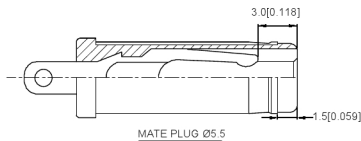

NOTES:

笔记:

1. CONTACT CURRENT RATING: 7A
1. 触点额定电流: 7A
2. CONTACT RESISTANCE: 50 mΩ MAX
2. 接触电阻: 最大 50 mΩ
3. INSULATION RESISTANCE: 100MΩ MIN
3. 绝缘电阻: 100MΩ MIN
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
4. 耐介质: 最小 500V AC.
5. DURABILITY: 5,000 CYCLES MIN.
5. 耐久性: 至少 5,000 次循环。
6. CONNECTOR MATING FORCES: 29.4N (3.00Kg) MAX.;
6. 连接器配合力: 最大 29.4N (3.00Kg) 。
7. CONNECTOR UNMATING FORCES: 2.94N (0.30Kg) MIN
7. 连接器脱离力: 最小 2.94N (0.30Kg)

SCHEMATIC	
Model	DC-044AE
Center Pin	Ø2.0 mm
	Ø2.5 mm

	MATERIAL	PLATING
axis support	Brass	silver
center pin	Brass	silver
plastic	Pbt	
terminal 1	Brass	silver
terminal 2	Phosphor Bronze	silver
terminal 3	Brass	silver

广东星坤科技股份有限公司

生效日期	文件工程章
MARK	DESCRIPTION
REVISIONS	DATE
REVISED	APPROVED
UNSPECIFIED TOLERANCES	

DSND	DATE	SCALE: N/A	MODEL TYPE: DC POWER JACK
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	DC-044AE-2.0
			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)