





- NOTES:  
 注释  
 1.CONTACT CURRENT RATING:7A  
 触点额定电流: 7A  
 2.CONTACT RESISTANCE:50 mΩ MAX  
 接触电阻: 最大50 mΩ  
 3. INSULATION RESISTANCE:100MΩ MIN  
 绝缘电阻: 100MΩ MIN  
 4.DIELECTRIC WITHSTANDING: 500V AC MIN.  
 耐介质: 至少500V AC.  
 5.DURABILITY:5.000 CYCLES MIN.  
 耐久性: 至少5.000次循环。  
 6.CONNECTOR MATING FORCES:29.4N(3.00KgF)MAX.;  
 连接器配合力: 最大29.4N (3.00KgF) ；  
 7.CONNECTOR UNMATING FORCES:2.94N(0.30KgF) MIN  
 连接器脱离力: 最小2.94N (0.30KgF)



SCHEMATIC	
Model	DC-044AE Ø2.0 mm
Center Pin	Ø2.5 mm

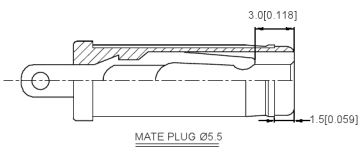

	MATERIAL	PLATING
axis support	Brass	silver
center pin	Brass	silver
plastic	Pbt	
terminal 1	Brass	silver
terminal 2	Phosphor Bronze	silver
terminal 3	Brass	silver

广东星坤科技股份有限公司

生	日期
效	
Δ	
Δ	
Δ	

文件工程章

MARK	DESCRIPTION	REVISIONS	DATE	REVISED	APPROVED
------	-------------	-----------	------	---------	----------

www.xk-09.com www.helloxk.com www.helloxk.cn

DSND		DATE		SCALE: N/A	MODEL TYPE: DC POWER JACK
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	DC-044AE-2.5
UNSPECIFIED TOLERANCES				WEIGHT	SHEET
VVP INDUSTRIAL PRECISION CO., LIMITED				1.0g	1/1
				REVISION	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)