



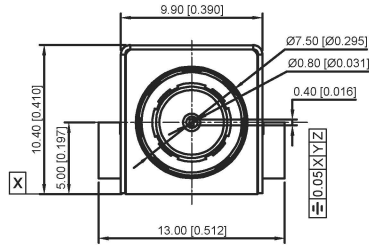


PCB LAYOUT TOP VIEW
TOLERANCES:±0.05

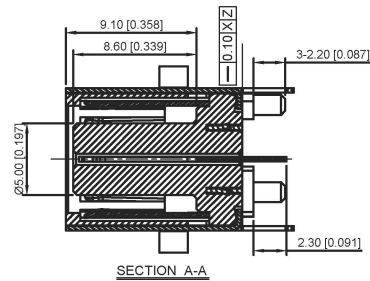


DC PLUG

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING:25V,8A Min
 - CONTACT RESISTANCE:
 - 50MILLIOHMS Max.FOR INITIAL, 80MILLIOHMS Max.FFTER 5000 CYCLES
 - INSULATION RESISTANCE:10 MEGAOHMS Min. BY 500V DC AFTER 1 MINUTE.
 - DIELECTRIC WITHSTANDING VOLTAGE:500V RMS AFTER 1 MINUTE.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE:0.3~3.0 KGF(2.94~29.4N)
 - WITHDRAWAL FORCE:0.3~3.0 KGF(2.94~29.4N)
 - LIFE TEST:5000 CYCLES MIN.



SECTION A-A



NO.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)
⑥	COVER	1	HIGH TEMP.THERMOPLASTIC	Black
⑤	HOUSING	1	HIGH TEMP.THERMOPLASTIC	Black
④	SHELL	1	COPPER ALLOY t=0.30	Ni-Plated
③	TERMINAL 3#	1	COPPER ALLOY t=0.30	Au-Plated
②	TERMINAL 2#	1	COPPER ALLOY t=0.30	Au-Plated
①	TERMINAL 1#	1	COPPER ALLOY t=0.30	Au-Plated

广东星坤科技股份有限公司

生	日期
發	
ΔX	
MARK	
文件工程章	

REVISIONS

www.xk-ig.cn www.helloxkb.com www.helloxkb.cn

ANGULAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	

DSND	DATE	SCALE: N/A	MODEL TYPE: DC POWER JACK
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	DC-070D-8A-0.8
KKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)