



SECTION A-A

MATERIAL:

- ① HOUSING: THERMOPLASTIC, GLASS FIBER FILLED. UL 94V-0 RATED.
- ② SPACER: THERMOPLASTIC, GLASS FIBER FILLED. UL 94V-0 RATED.
- ③ CONTACT: C5191R-H (t=0.30mm).
- ④ FRONT SHIELD: SPCC (t=0.40mm).

FINISH:

CONTACT: UNDER PLATED 50u" MIN. NICKEL ALL OVER 100u" MIN. MATTE TIN IN SOLDERING AREA GOLD PLATED IN CONTACT AREA.  
FRONT SHIELD: NICKEL PLATED WITH 100u" THICK.

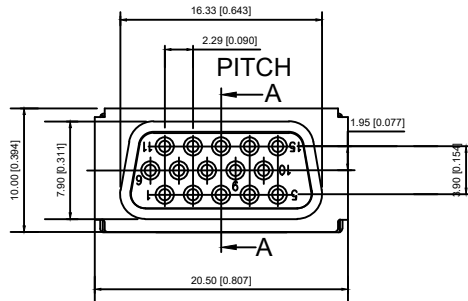

HOUSING COLOR

1:BLACK

CONTACT GOLD PLATED


A:G/F+MATTE TIN

PACKAGE

0:TRAY

SHELL PLATING

N:NICKEL



PART NO. DESCRIPTION:

DOR07-15 - X

①

① MARK

0:NON MARK

5: +D/C

X: XKB+D/C

						ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE:	
						L ≤ 4	±0.2	DWN		DATE		VIEW:	DB CONNECTOR	
ΔX						4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm/in	PART NO.:	
ΔX						16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	DWG NO.:	
MARK	DESCRIPTION	DATE	REVISED	APPROVED		L > 63	±0.5						DOR07-15-X	
REVISIONS						UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn												1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)