


Technolo Request:

- 1.Outlook:
N0 burr,no hurt.
- 2.Electronic performance:
a:Insulation resistance:
Above DC500V/100M Ω ;
b:Endure voltage:
AC500V at 1 minute;
c>Contact resistance:
Under 30M Ω ;
- 3.Insertion fore & withdrawal force;0.3-3kgf.
- 4.Salt spray test :24H.
- 5.Meet RoHS.

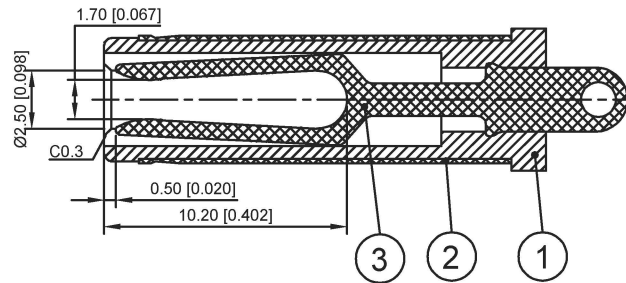

| | MATERIAL | PLATING |
|----------------|-----------------|---------|
| Terminal | phosphor bronze | NI |
| Fork hook tube | H65 | NI |
| Plastic | Pbt | Black |

广东星坤科技股份有限公司

生 日期
發 日期

文件工程章

REVISIONS

www.xk-ig.cn www.helloxkb.com www.helloxkb.cn

ANGLAR $\pm 5^\circ$
 $L \leq 4$ ± 0.2
 $4 < L \leq 16$ ± 0.3
 $16 < L \leq 63$ ± 0.4
 $L > 63$ ± 0.5

UNSPECIFIED TOLERANCES

| | | | |
|---------------------------------------|------|-------------|-------------------------|
| DSND | DATE | SCALE: N/A | MODEL TYPE: DC PIUG |
| DWN | DATE | VIEW: | PART NO.: DT-2255525 |
| CHKD | DATE | UNIT: mm/in | DWG NO.: |
| APPD | DATE | SIZE: A4 | |
| KXB INDUSTRIAL PRECISION CO., LIMITED | | | WEIGHT 1.0g |
| | | | SHEET 1/1 |
| | | | REVISION A0 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)