

Specifications:

Voltage rating:30V AC/DC

Current rating:0.5 A AC/DC


Withstanding voltage: 500V AC/minute

Temperature range:-30° ~+70


Insulation resistance:≥100MΩ

Contact resistance: ≤30mΩ

After environmental testing:≤20mΩ

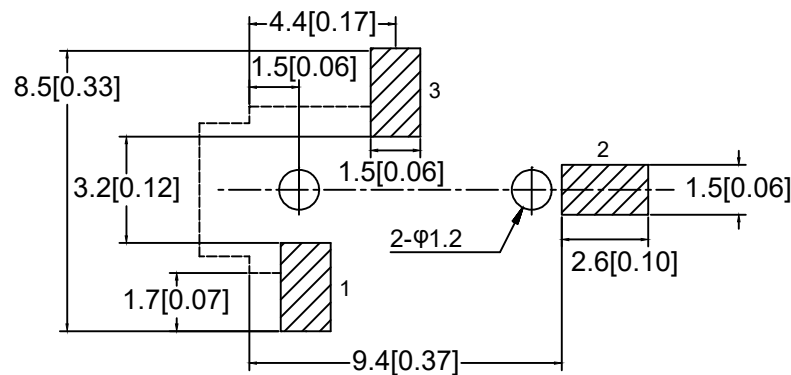

P.C.B LAYOUT TOP VIEW

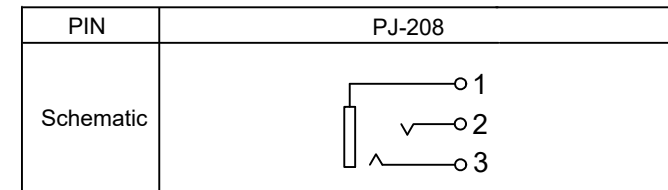

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	AG
terminal 2	Phosphor Bronze	AG
terminal 3	Phosphor Bronze	AG
plastic	PAA	

					ANGULAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK			
Δx					L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.:			
Δx					4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm/in	DWG NO.:			
Δx					16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	PJ-208			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5	UNSPECIFIED TOLERANCES					XKB INDUSTRIAL PRECISION CO., LIMITED	WEIGHT	SHEET	REVISION
REVISIONS												1.0g	1/1	A0	
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn															

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)