

Specifications:

Voltage rating:30V AC/DC


Current rating:0.5 A AC/DC

Withstanding voltage: 500V AC/minute

Temperature range:-40° ~+55

Insulation resistance:≥100MΩ

PIN	PJ-210
Schematic	

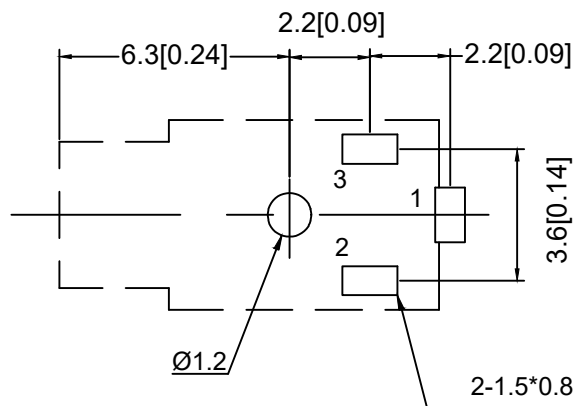

	MATERIAL	PLATING
terminal 1	Brass	AG
terminal 2	Phosphor Bronze	AG
terminal 3	Phosphor Bronze	AG
plastic	PA66	
Axle sleeve	Brass	Au

				ANGULAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK		
Δx				L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.:		
Δx				4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm/in	DWG NO.:		
Δx				16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	PJ-210		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63				UNSPECIFIED TOLERANCES	KXB INDUSTRIAL PRECISION CO., LIMITED			
REVISIONS											WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn											1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)