
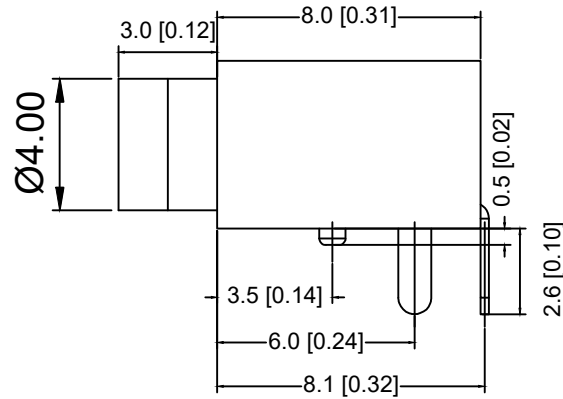





Ø2.6±0.05

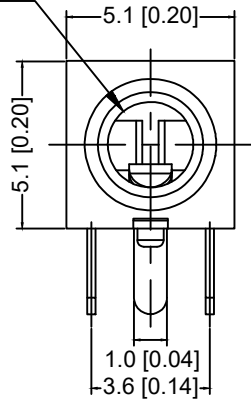

NOTES:

1.ELECTRICALCHARACTERS:

- 1-1.RATING:DC 30V 0.5A:
- 1-2.CONTATCT RESISTANCE:<30mΩ;
- 1-3.INSULATION RESISTANCE:>100MΩ DC500V;
- 1-4.WITHSTANDING VOLTAGE:AC 500V 1min;
- 1-5.LIFE:5.000CYCLES:
- 2.MECHANICALCHARACTERISTICS:
- 2-1.INSERTION&EXTRACTION FORCE:3~30N:
- 2-2.OPERATINC TEMPERATURE:-30°C~+70°C:

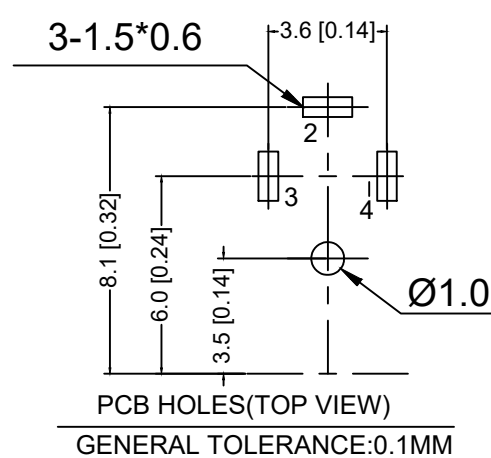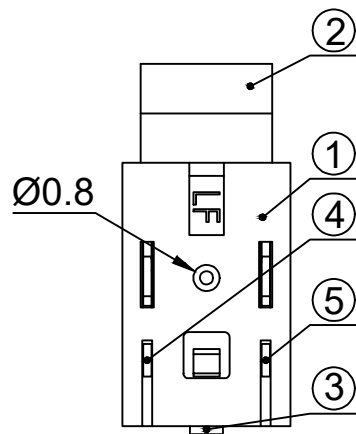

⑤	TERMINAL	4	1	Manganese steel t=0.25	SnSb	PLATED
④	TERMINAL	3	1	Manganese steel t=0.25	SnSb	PLATED
③	TERMINAL	2	1	Manganese steel t=0.25	SnSb	PLATED
②	AXLE SLEEVE		1	H59	CuSn	PLATED
①	HOUSING		1	PA66		BLACK

					ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK		
					L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.:		
					4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm/in	DWG NO.:		
					16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	PJ-210A		
					L > 63	±0.5						WEIGHT	SHEET	REVISION
					UNSPECIFIED TOLERANCES		KXB INDUSTRIAL PRECISION CO.,LIMITED					1.0g	1/1	A0
MARK	DESCRIPTION	DATE	REVISED	APPROVED										
REVISIONS														
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn														

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)