

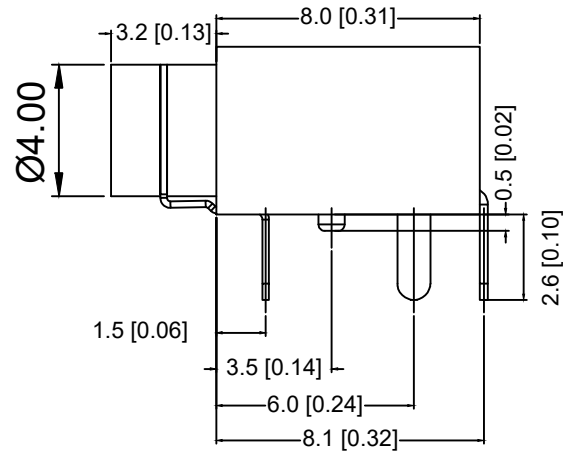




Ø2.6±0.05

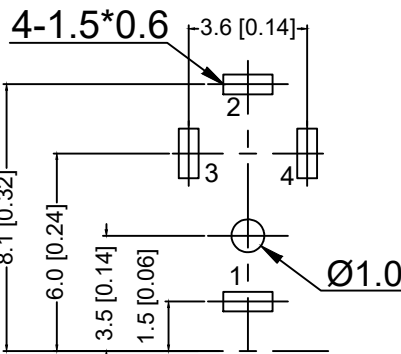


NOTES:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 30V 0.5A;
 - 1-2. CONTACT RESISTANCE: <30mΩ;
 - 1-3. INSULATION RESISTANCE: >100MΩ DC500V;
 - 1-4. WITHSTANDING VOLTAGE: AC 500V 1min;
 - 1-5. LIFE: 5.000 CYCLES;
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION & EXTRACTION FORCE: 3~30N;
 - 2-2. OPERATING TEMPERATURE: -30°C ~ +70°C;

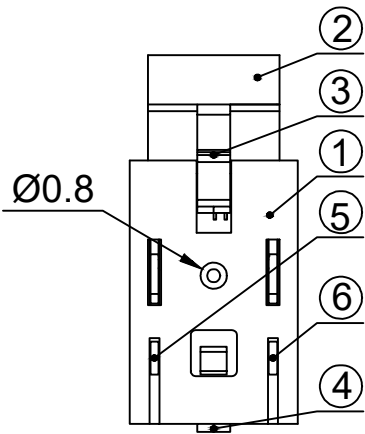

PCB HOLES (TOP VIEW)
GENERAL TOLERANCE: 0.1MM



5	TERMINAL	4	1	Manganese steel t=0.25	SnSb	PLATED
4	TERMINAL	3	1	Manganese steel t=0.25	SnSb	PLATED
3	TERMINAL	2	1	Manganese steel t=0.25	SnSb	PLATED
2	AXLE SLEEVE	1	1	H59	CuSn	PLATED
1	HOUSING	1	1	PA66		BLACK

					DSND		DATE		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK		
					DWN		DATE		VIEW:	PART NO.:		
					CHKD		DATE		UNIT: mm/in	DWG NO.:		
					APPD		DATE		SIZE: A4	PJ-210B		
REVISIONS					UNSPECIFIED TOLERANCES					WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					XKB INDUSTRIAL PRECISION CO., LIMITED					1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)