



**SPECIFICATION**

1. Rating : DC 30V 1.0A;
2. Contact resistance:  $\leq 0.03\Omega$ ;
3. Insulation resistance:  $\geq 100M\Omega$  (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.


**P.C.B LAYOUT  
TOP VIEW**

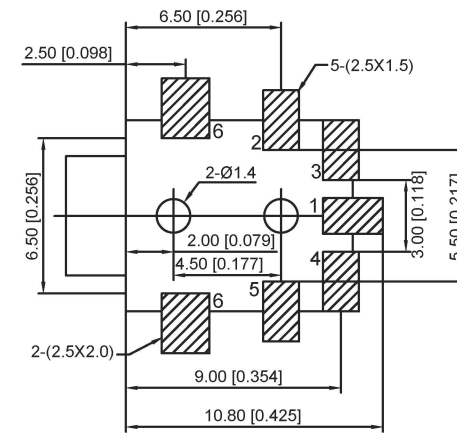

**SCHEMATIC**

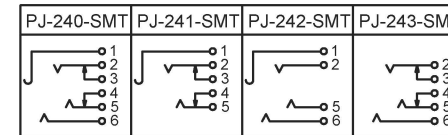

	MATERIAL	PLATING
terminal 1	SUS	silver
terminal 2	SUS	silver
terminal 3	Brass	silver
terminal 4	Brass	silver
terminal 5	SUS	silver
terminal 6	Phosphor Bronze	silver
plastic	PA9T	

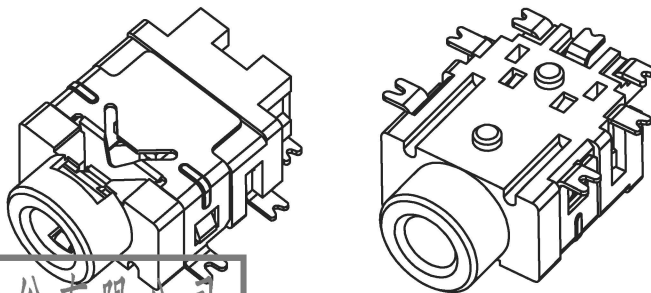

广东星坤科技股份有限公司

生效日期

MARK DESCRIPTION

文件工程章

REVISIONS

www.helloxb.com www.helloxb.com www.helloxb.com

ANGLAR ±5°  
L ≤ 4 ±0.2  
4 < L ≤ 16 ±0.3  
16 < L ≤ 63 ±0.4  
L > 63 ±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	PJ-24X-SMT
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)