





Temperature :-20~70C  
 Rated Load: DC 30V 0.3A  
 Contact Resistance :<0.03  
 Insulation Resistance: >100M  
 Withstand Voltage :AC500V(50Hz)/min  
 Actuating Force :2.2~30N  
 Life :3000N

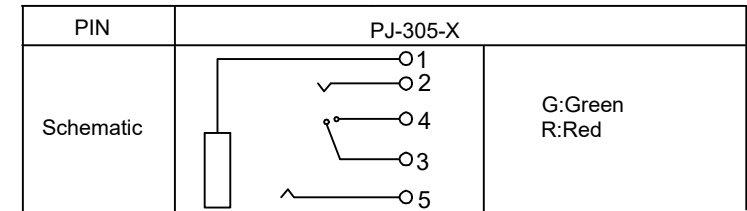

	MATERIAL	PLATING
terminal 1	Brasse	ag
terminal 2	Phosphor Bronze	ag
terminal 3	Phosphor Bronze	ag
terminal 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
plastic	Pbt	

REVISIONS					UNSPECIFIED TOLERANCES			DSND	DATE	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
Δx					ANGULAR	±5°		DWN	DATE	VIEW:	PART NO.:		
Δx					L ≤ 4	±0.2		CHKD	DATE	UNIT: mm/in	DWG NO.:		
Δx					4 < L ≤ 16	±0.3		APPD	DATE	SIZE: A4	PJ-305-X		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.4		KKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT	SHEET	REVISION
					L > 63	±0.5					1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)