
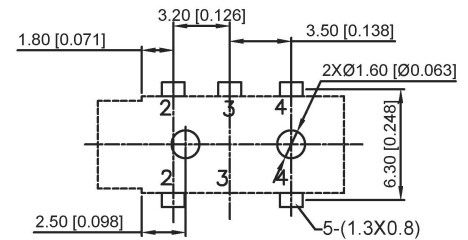


PJ-3135-

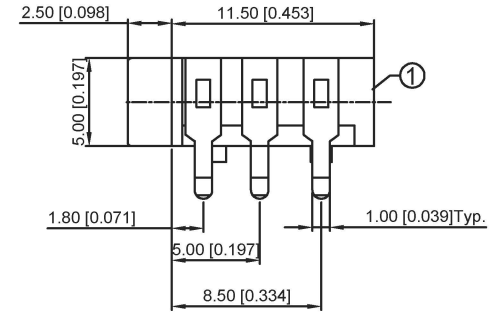

PJ-3136-


SCHMATIC

PJ-3135-	PJ-3136-

R:red	G:green
Y:yellow	B:black
W:white	I:transparent

SPECIFICATION

1. Rating: DC 30V 10A
2. Contact resistance: $\leq 30m\Omega$
3. Insulation resistance: $\geq 100m\Omega$
4. Withstand voltage: 500VAC
5. Insertion and extraction force: 3-20N
6. life test: 5,000 cycles



Ø3.5 MATING PLUG

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Phosphor Bronze	tin
plastic	Pbt	

广东星坤科技股份有限公司

生效日期

文件工程章

日期

REVISIONS

www.helloxkb.com www.helloxkb.com www.helloxkb.com

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE:
									3.5 PHONE JACK
								VIEW:	PART NO.:
								UNIT: mm/in	DWG NO.:
								SIZE: A4	PJ-313X-X
									WEIGHT
									SHEET
									REVISION
									1.0g
									1/1
									A0

XKB INDUSTRIAL PRECISION CO., LIMITED

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)