
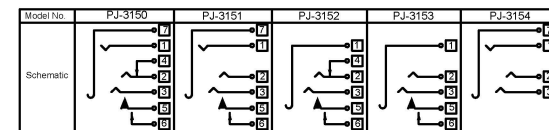
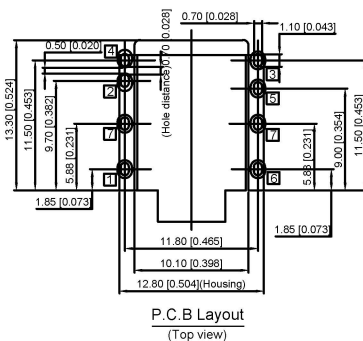

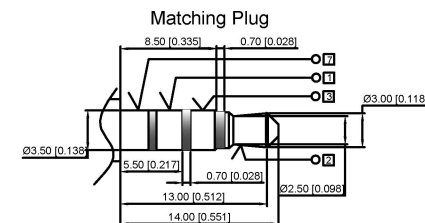

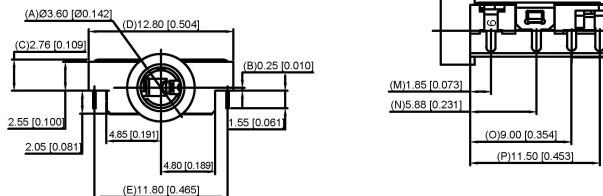


Specification:

1. Rating : DC 30V 0.5A;
2. Contact resistance:  $\leq 30\text{m}\Omega$ ;  
After life test:  $\leq 50\text{m}\Omega$
3. Insulation resistance:  $\geq 100\text{M}\Omega$  (500VDC);  
After life test:  $\geq 50\text{M}\Omega$
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3N~25N;
6. life test: 5000cycles min;
7. Operation temperature range:  $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
8. Preservative temperature range:  $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
9. Sign"▲ "is importance dimension



	MATERIAL	PLATING
terminal 1	copper alloy	silver
terminal 2	copper alloy	silver
terminal 3	copper alloy	silver
terminal 4	copper alloy	silver
plastic	PA9T	

广东星坤科技股份有限公司

生效日期

MARK DESCRIPTION

REVISIONS

www.hellokx.com www.hellokx.com www.hellokx.com

DATE REVISED APPROVED

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.: PJ-315X
APPD		DATE		SIZE: A4	WEIGHT SHEET REVISION 1.0g 1/1 A0
XKB INDUSTRIAL PRECISION CO., LIMITED					

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)