



RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

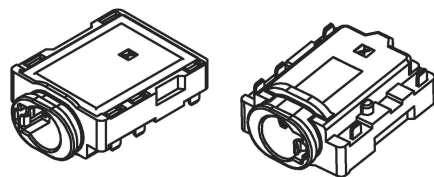

NOTES:

- CONTACT CURRENT RATNG: 12V 1A.
- CONTACT RESISTANCE: 50mΩ MAX.
- INSULATION RESISTANCE: 100MΩ MIN.500V DC.
- DIELECTRIC WITHSTANDING: 500V AC MIN.
- DURABILITY: 5,000 CYCLES MIN.
- CONNECTOR MATING FORCES: 29.4N (3.00KgF) MAX.
- CONNECTOR UNMATING FORCES: 2.94N(0.30KgF) MIN.
- THE PRODUCT MACHINE WITH A GAP THAT: THE FINSHED MACHINE WITH SOCKET BEFORE/UP/DOWN/LEFT/RIGHT SIDE OF 5, PROTECTION GAP FIRST PROPOSED THE DESING OF 0.15mm.

PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC

NO.	DESCRIPTION	MAT.L	COLOR	REMARK
8	GLUE WATER	EPOXY	BLACK	——
7	COVER	HIGH TEMP	BLACK	——
6	HOUSING	HIGH TEMP	BLACK	——
5	TERMINAL-5	COPPER ALLOY	——	Au PLATED
4	TERMINAL-4	COPPER ALLOY	——	Au PLATED
3	TERMINAL-3	COPPER ALLOY	——	Au PLATED
2	TERMINAL-2	COPPER ALLOY	——	Au PLATED
1	TERMINAL-1	COPPER ALLOY	——	Au PLATED

广东星坤科技股份有限公司

生效日期

文件工程章

日期

REVISIONS

www.hellokx.com www.hellokx.com www.hellokx.com

ANGLAR ±5°
L ≤ 4 ±0.2
4 < L ≤ 16 ±0.3
16 < L ≤ 63 ±0.4
L > 63 ±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	3.5 PHONE JACK
CHKD	DATE	UNIT: mm/in	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.: PJ-3257
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT: 1.0g
			SHEET: 1/1
			REVISION: A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)