
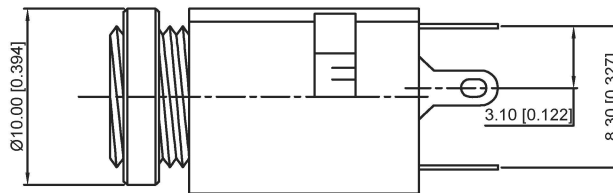



SCHEMATIC

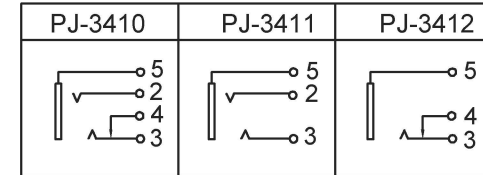

SPECIFICATIONS:

RATING: 12V DC @ 1A

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 50M OHMS MIN: 100V DC

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Brass	tin
terminal 5	Phosphor Bronze	tin
plastic	Pbt	

广东星坤科技股份有限公司

生效日期

MARK DESCRIPTION

文件工程章

REVISIONS
www.hellokb.com www.hellokb.com www.hellokb.com

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE <td>VIEW: </td> <td>3.5 PHONE JACK</td>	VIEW:	3.5 PHONE JACK
CHKD	DATE <td>UNIT: mm/in</td> <td>PART NO.:</td>	UNIT: mm/in	PART NO.:
APPD	DATE <td>SIZE: A4</td> <td>DWG NO.: PJ-341X</td>	SIZE: A4	DWG NO.: PJ-341X
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT SHEET REVISION
			1.0g 1/1 A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)