
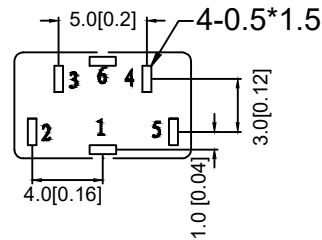

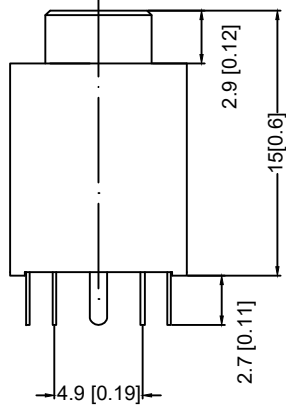
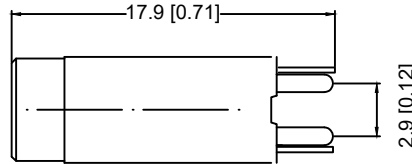


Temperature -20~70C
 Rated Load DC30V 0.3A
 Contact Resistance <0.03
 Insulation Resistance >100M
 Withstand Voltage AC500V(50Hz)/min
 Actuating Force 2.2~30N
 Life 3000N



| PIN | PJ-359H-X | |
|-----------|-----------|--------------------|
| Schematic | | B:Black W:White |

| | MATERIAL | PLATING |
|------------|-----------------|---------|
| termina 1 | Phosphor Bronze | ag |
| termina 2 | Phosphor Bronze | ag |
| termina 3 | Phosphor Bronze | ag |
| termina 4 | Phosphor Bronze | ag |
| terminal 5 | Phosphor Bronze | ag |
| terminal 6 | Phosphor Bronze | ag |
| Plastic | PA66 | |
| Plastic | Pom | |
| base | PBT | |

| REVISIONS | | | | | UNSPECIFIED TOLERANCES | DSND | DATE | SCALE: N/A | MODEL TYPE: 3.5 PHONE JACK | |
|-----------|-------------|------|---------|----------|---------------------------------------|---------|------|-------------|-------------------------------|----------|
| ΔX | | | | | ANGULAR | ±5° | | | | |
| ΔX | | | | | X.X | ±0.2mm | | VIEW: | PART NO.: | |
| ΔX | | | | | X.XX | ±0.1mm | | UNIT: mm/in | | |
| ΔX | | | | | X.XXX | ±0.05mm | | SIZE: A4 | DWG NO.: PJ-359 | |
| MARK | DESCRIPTION | DATE | REVISED | APPROVED | XKB INDUSTRIAL PRECISION CO., LIMITED | | | WEIGHT | SHEET | REVISION |
| | | | | | | | | 1.0g | 1/1 | A0 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)