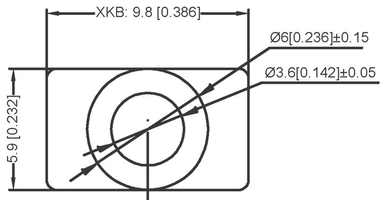

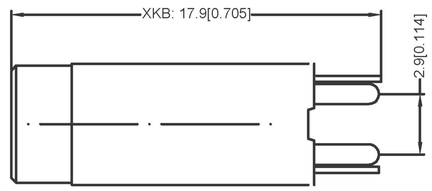

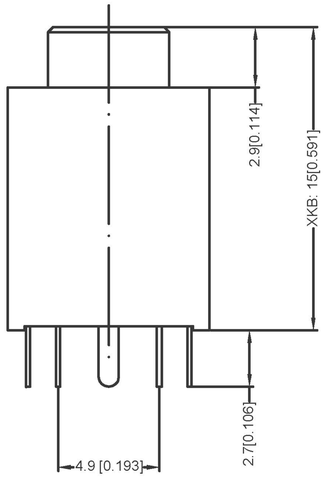

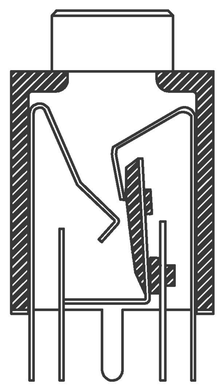



Temperature :-20~70 C
温度：-20~70 C
Rated Load: DC 30V 0.3A
额定负载: DC 30V 0.3A
Contact Resistance :<0.03
接触电阻 :<0.03
Insulation Resistance: >100M
绝缘电阻: >100M
Withstand Voltage :AC500V(50Hz)/min
耐受电压 : AC500V(50Hz)/min
Actuating Force :2.2~30N
驱动力：2.2~30N
Life :3000N
寿命: 3000N

	MATERIAL	PLATING
termina 1	Phosphor Bronze	ag
termina 2	Phosphor Bronze	ag
termina 3	Phosphor Bronze	ag
termina 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
terminal 6	Phosphor Bronze	ag
Plastic	PA66	
Plastic	Pom	
copper bush	Brass	tin
base	PBT	

PIN	PJ-359H-X	
Schematic	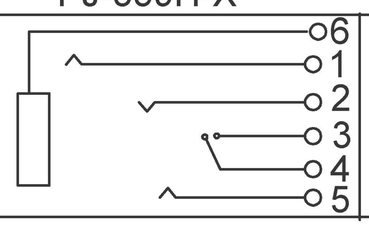	B:Black W:White

广东星坤科技股份有限公司
生效日期
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm/in
APPD		DATE		SIZE: A4

XKB INDUSTRIAL PRECISION CO.,LIMITED

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

MODEL TYPE: 3.5 PHONE JACK

PART NO.:

DWG NO.: PJ-359H-X

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

>>XKB Connectivity(中国星坤)

Downloaded From Oneyac.com