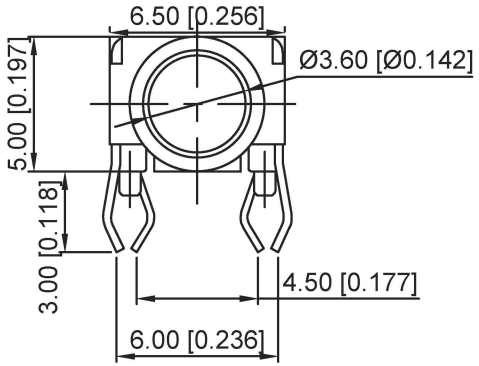

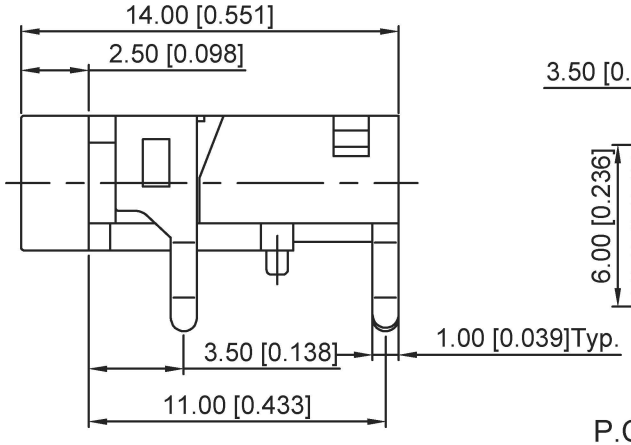

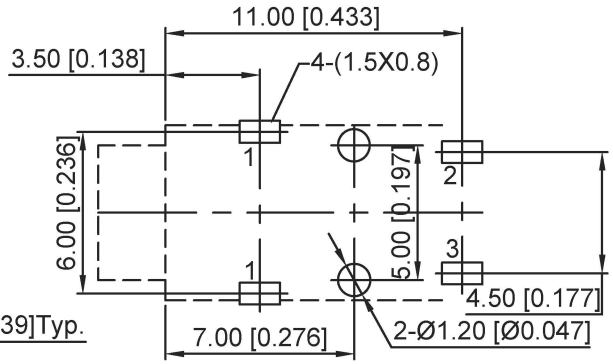

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

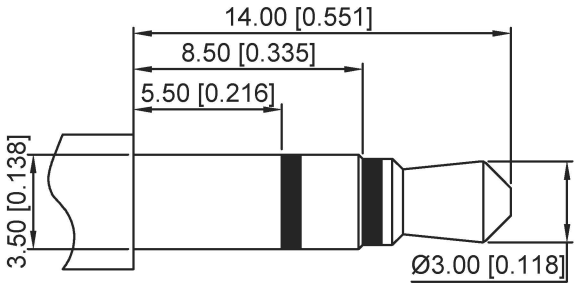

Ø3.50mm 3 POLE PLUG

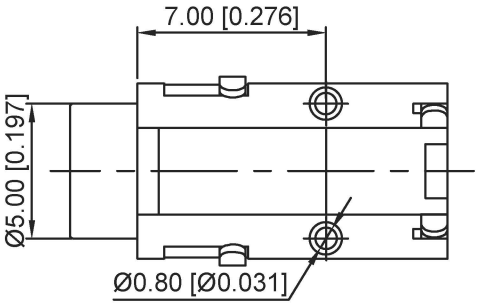

SPECIFICATION

1. Rating: DC 30V 0.5A;
2. Contact resistance: ≤30mΩ;
3. Insulation resistance: ≥100MΩ;
4. Withstand voltage: 500VAC;
5. Insertion and extraction force:3-20N;
6. Life test: 5,000 cycles.

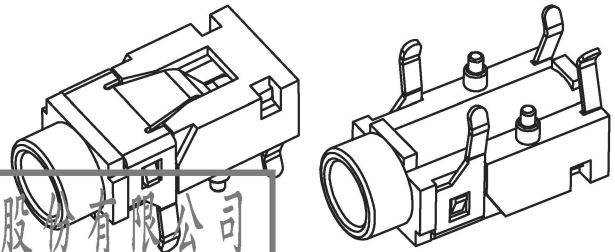

MODEL NO.	PJ-3733
SCHEMATIC	

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Pbt	

广东星坤科技股份有限公司
生效 日期
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤4	±0.2
4<L≤16	±0.3
16<L≤63	±0.4
L>63	±0.5

www.xkdg.cn www.helloxkb.com www.helloxkb.cn

DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.: PJ-3733
APPD		DATE		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>XKB Connectivity(中国星坤)

Downloaded From Oneyac.com