


Temperature	-20~70 C
Rated Load	DC 30V 0.3A
Contact Resistance	<0.03
Insulation Resistance	>100M
Withstand Voltage	AC500V(50HZ)/min
Actuating Force	8 ~30N
Life	3000N

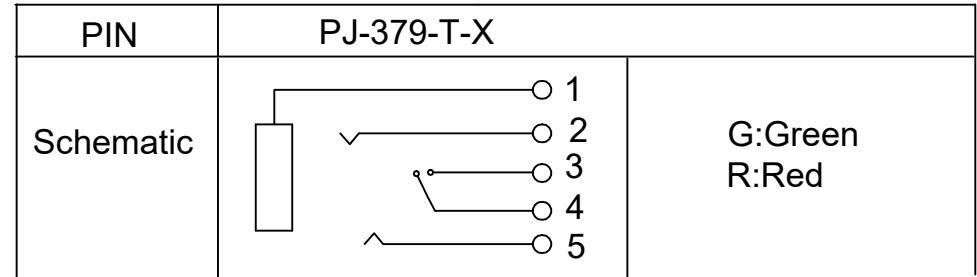

	MATERIAL	PLATING
termina 1	Phosphor Bronze	ag
termina 2	Phosphor Bronze	ag
termina 3	Phosphor Bronze	ag
termina 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
copper bush	Brass	tin
base	PA66	
cover	PA66	
Shell	SUS	

					ANGULAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
Δx					L ≤ 4	±0.2	DWN	DATE	VIEW:	PART NO.:
Δx					4 < L ≤ 16	±0.3	CHKD	DATE	UNIT: mm/in	DWG NO.:
Δx					16 < L ≤ 63	±0.4	APPD	DATE	SIZE: A4	PJ-379-X
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5	UNSPECIFIED TOLERANCES			WEIGHT
REVISIONS							KXB INDUSTRIAL PRECISION CO., LIMITED			SHEET
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn										REVISION
										1.0g
										1/1
										A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)