

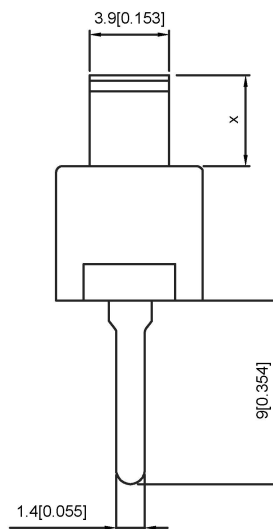


Specification:

1. Rating: 6A 120VAC
2. Contact resistance: $\leq 30 \text{ m}\Omega$
3. Insulation resistance: $\geq 100 \text{ M}\Omega$ (DC500V/Min)
4. Electronics life: > 10000 cycles
5. Operation force: $250 \pm 100 \text{ gf}$

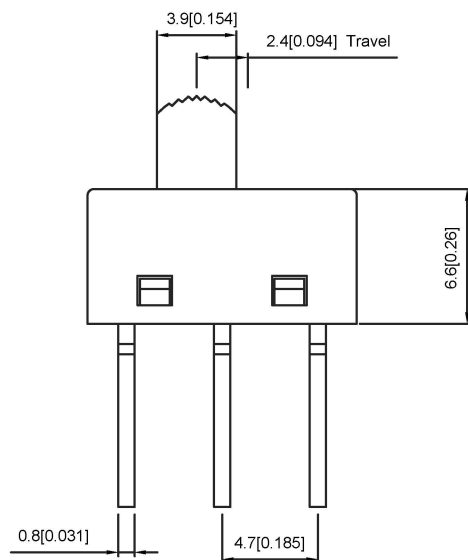

SS-12M10 X X



ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
7	Terminal	1	Phosphor bronze	Plating silvering
6	Bridge piece	1	Phosphor bronze	Plating silvering
5	Spring	1	carbon steel	
4	Rotor	1	Iron sleeve	NI
3	Base	1	PA46	
2	Shell	1	PA46	
1	Keystake	1	PA66	

Function		
ON	NA	ON
	/	

广东星坤科技股份有限公司

生 日期
 ΔX 效 日期
 ΔX 文件 工程 章
 MARK DESCRIPTION REVISIONS
 www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A
DWN	DATE	VIEW:
CHKD	DATE	UNIT: mm/in
APPD	DATE	SIZE: A4

MODEL TYPE:	WEIGHT	SHEET	REVISION
SLIDE SWITCH	1.0g	1/1	A0

KKB INDUSTRIAL PRECISION CO., LIMITED

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)