




Code-x	H	Code-x	H
A	4.3	O	11.0
B	4.5	P	11.5
C	5.0	Q	12
D	5.5	R	12.5
E	6.0	S	13.0
F	6.5	T	13.5
G	7.0	U	14.0
H	7.5	V	15.0
I	8.0	W	15.5
J	8.5	X	16
K	9.0	Y	16.5
L	9.5	Z	17
M	10.0		
N	10.5		

**SPECIFICATION**

Contact rating: 50mA, 12V DC  
 Contact Resistance: 100mΩ max  
 Dielectric Strength: 250V AC/1minute  
 Travel: 0.25mm  
 Operating Temp: -30°C ~ +85°C  
 Storage Temp: -30°C ~ +80°C



PAPT NO	TC-1102DE-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	Code-x

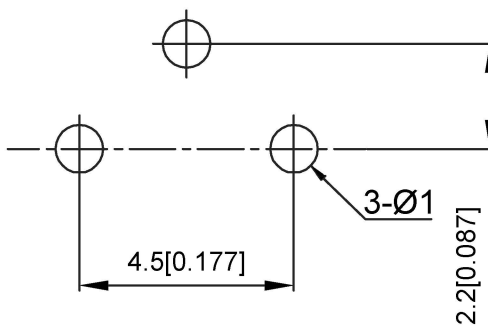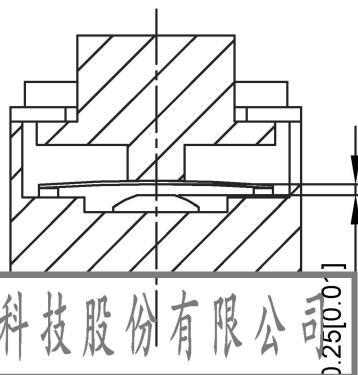

⑤	Terminal	3	Brass (0.30t)	ag Plated		
④	Contact	1	F ag/SUS			
③	Base	1	PPA			
②	Cover	1	Brass	Tin plated		
①	Keystake	1	PPA			
ITEM	PAPT NMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

生效	日期
文件	工程
章	

units:	mm
tolerance:	X.X ±0.2mm
	X.XX ±0.1mm
	X.XXX ±0.05mm
UNSPECIFIED TOLERANCES	

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	TACT SWITCH
CHKD		DATE		UNIT: mm/in	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED					TC-1102DE-X-X
	WEIGHT	SHEET	REVISION		
	1.0g	1/1	A0		

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)