



CIRCUIT



P.C.B LATOUT

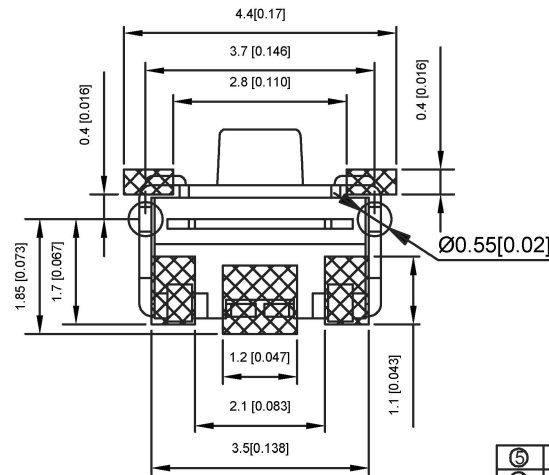

SPECIFICATION

Contact Rating: 50mA 12V DC  
 Contact Resistance: 100mΩ max  
 Insulation Resistance: 100MΩ min.500V DC  
 Dielectric Strength: 250V AC/1 minute  
 Travel: 0.15mm  
 Operating Temp: -25°C +70°C  
 Storage Temp: -30°C +80°C

PAPT NO	TS-1010GS-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:3.05

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	2	F.ag/SUS	—	—
③	Base	—	1	LCP	Natural	—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	LCP	—	—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

生效日期

文件工程章

UNSPECIFIED TOLERANCES	units: mm
	tolerance:
	X.X ±0.2mm
	X.XX ±0.1mm
	X.XXX ±0.05mm

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	TACT SWITCH
CHKD	DATE	UNIT: mm/in	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
			TS-1010GS-X
			WEIGHT
			1.0g
			SHEET
			1/1
			REVISION
			A0

KXB INDUSTRIAL PRECISION CO., LIMITED

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)