


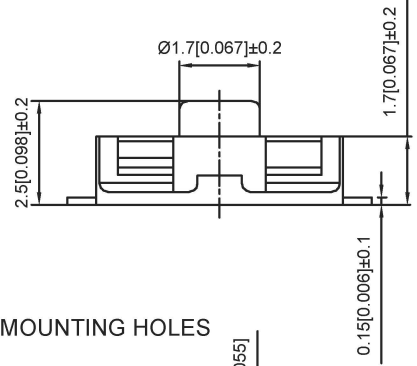


SPECIFICATION



Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30°C ~ +85°C
 Storage Temp: -30°C ~ +80°C



| | |
|-----------------|-------------------------------------|
| PAPT NO | TS-1105G-X-X-A |
| Operating Force | A: 100gf B: 160gf C: 260gf |
| Height | H: 2.5 |
| color | B: black BL: blue |
| line | A: Normally open B: Normally closed |



P.C.B MOUNTING HOLES



PACKING REEL YPE 3,000/1REEL(EA)

| ITEM | PAPT NAMF | TER,NO | QTY | MATERIAL | FINISHING | REMARK |
|------|-----------|--------|-----|---------------|-------------------|--------|
| ⑤ | Terminal | — | 2 | Brass (0.30t) | Plating silvering | — |
| ④ | Contact | — | 1 | F.ag/Sus | Natural | — |
| ③ | Base | — | 1 | Pa46 | | — |
| ② | Cover | — | 1 | Spcc | Plating Nickel | — |
| ① | Keystake | — | 1 | Silica gel | | — |

广东星坤科技股份有限公司

| | |
|------|----|
| 生 | 日期 |
| ΔX | |
| ΔX | |
| ΔX | |
| MARK | |

文件工程章

| | | | | | |
|------------------------|--|------|--|---------------------------------------|-------------------------|
| DSND | | DATE | | SCALE: N/A | MODEL TYPE: TACT SWITCH |
| DWN | | DATE | | VIEW: | PART NO.: |
| CHKD | | DATE | | UNIT: mm/in | DWG NO.: |
| APPD | | DATE | | SIZE: A4 | TS-1105G-X-X-A |
| UNSPECIFIED TOLERANCES | | | | KXB INDUSTRIAL PRECISION CO., LIMITED | WEIGHT 1.0g |
| | | | | | SHEET 1/1 |
| | | | | | REVISION A0 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)