


SPECIFICATION


Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -40°C ~ +90°C
 Storage Temp: -30°C ~ +80°C

PCB.WELDING DRAWING



CIRCUIT DIAGRAM

PAPT NO	TS-1135-X
Operating Force	A:100gf B:160gf C:260gf

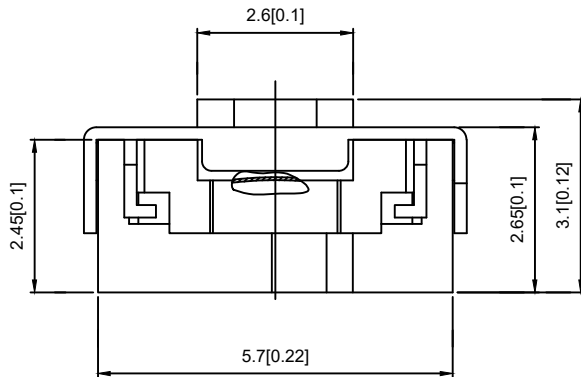

					units: mm	DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH
					tolerance:	DWN		DATE		VIEW:	PART NO.:
ΔX					X.X ±0.2mm	CHKD		DATE		UNIT: mm/in	DWG NO.: TS-1135-X
ΔX					X.XX ±0.1mm	APPD		DATE		SIZE: A4	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm	UNSPECIFIED TOLERANCES					WEIGHT 1.0g
REVISIONS						XKB INDUSTRIAL PRECISION CO., LIMITED					SHEET 1/1
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn											REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)