





SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.13mm
 Operating Temp: -30°C ~ +85°C
 Storage Temp: -30°C ~ +80°C

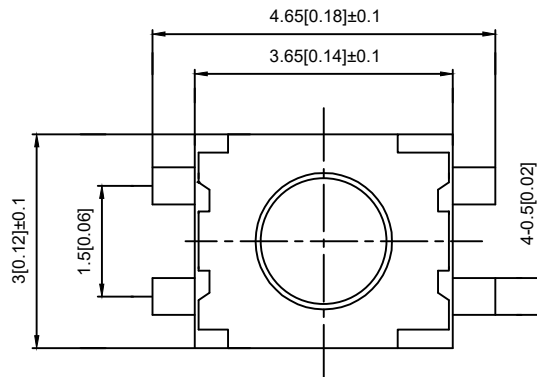

PAPT NO	TS-1185EC-X-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:A:1.8 B:1.85 C:1.92 D:2.0 E:2.5
Fixed column	B:black W:white

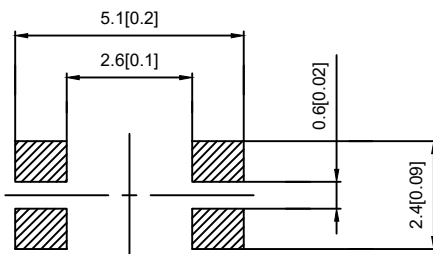

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp		—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Lcp		—

REVISIONS					UNSPECIFIED TOLERANCES		DSND	DATE	SCALE: N/A	MODEL TYPE:	
ΔX					units: mm					TACT SWITCH	
ΔX					tolerance:			VIEW:		PART NO.:	
ΔX					X.X ±0.2mm			UNIT: mm/in		DWG NO.:	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XX ±0.1mm			SIZE: A4		TS-1185EC-X-X-X	
						XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn									1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)