




**SPECIFICATION**

Contact Rating: 50mA, 12V DC  
 Contact Resistance: 100mΩ max  
 Insulation Resistance: 100mΩ min. 500V DC  
 Dielectric Strength: 250V AC/1minute  
 Travel: 0.25mm  
 Operating Temp: -30°C ~ +85°C  
 Storage Temp: -30°C ~ +80°C

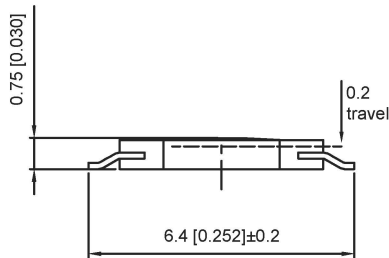

PAPT NO	TS-1187B-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:0.75

PCB Layout(pattern side)



Circuit Diagram

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
④	Dust Cover	—	1	Kapton Film	Yellow	—
③	Terminal	—	4	Brass (0.30t)	Plating silvering	—
②	Contact	—	1	F.ag/Sus	Natural	—
①	Base	—	1	Pa46	Black	—

广东星坤科技股份有限公司

生	ΔX	日期
效	ΔX	日期
ΔX	ΔX	日期
ΔX	ΔX	日期

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH	
DWN		DATE		VIEW:	PART NO.:	
CHKD		DATE		UNIT: mm/in	DWG NO.: TS-1187B-X	
APPD		DATE		SIZE: A4		
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT	SHEET	REVISION
				1.0g	1/1	A0

文件工程章

www.helloxkb.com www.helloxkb.com www.helloxkb.com

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)