

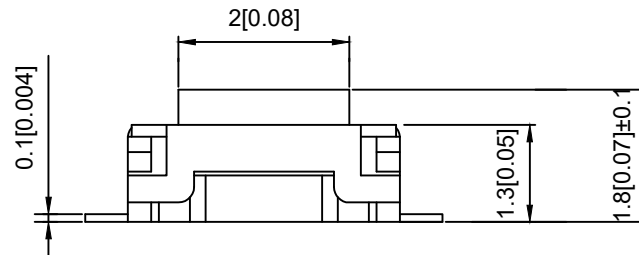



SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30°C ~ +85°C
 Storage Temp: -30°C ~ +80°C

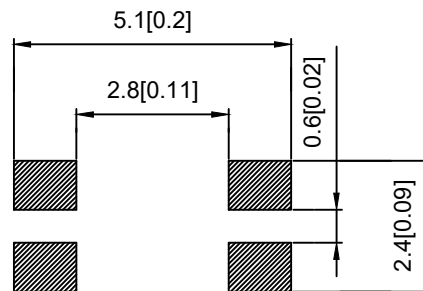

| | |
|-----------------|-------------------------|
| PAPT NO | TS-1809SM-X |
| Operating Force | A:100gf B:160gf C:260gf |
| | |
| | |



| ITEM | PAPT NAME | TER,NO | QTY | MATERIAL | FINISHING | REMARK |
|------|-----------|--------|-----|---------------|-------------------|--------|
| ⑤ | Terminal | — | 2 | Brass (0.30t) | Plating silvering | — |
| ④ | Contact | — | 1 | F.ag/Sus | Natural | — |
| ③ | Base | — | 1 | Lcp | — | — |
| ② | Cover | — | 1 | Brass | Plating Nickel | — |
| ① | Keystake | — | 1 | Pa46 | — | — |

| | | | | | |
|---------------------------------------|--|------|--|-------------|-----------------------------------|
| DSND | | DATE | | SCALE: N/A | MODEL TYPE: TACT SWITCH |
| DWN | | DATE | | VIEW: | PART NO.: |
| CHKD | | DATE | | UNIT: mm/in | DWG NO.: |
| APPD | | DATE | | SIZE: A4 | TS-1809SM-X |
| XKB INDUSTRIAL PRECISION CO., LIMITED | | | | WEIGHT | SHEET |
| | | | | 1.0g | 1/1 |
| | | | | REVISION | A0 |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | units: mm | tolerance: |
|---|-------------|------|---------|----------|------------------------|------------|
| Δx | | | | | X.X | ±0.2mm |
| Δx | | | | | X.XX | ±0.1mm |
| Δx | | | | | X.XXX | ±0.05mm |
| REVISIONS | | | | | UNSPECIFIED TOLERANCES | |
| www.xk-dg.cn www.helloxkb.com www.helloxkb.cn | | | | | | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)