




PCB LAYOUT(X0.5)

SPECIFICATION

Contact Rating: 50mA,12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min.500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.20mm
 Operating Temp: -30°C~+85°C
 Storage Temp: -30°C~+80°C

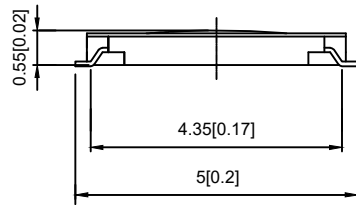

| | |
|-----------------|-----------------|
| PAPT NO | TS-1824SR-X |
| Operating Force | B:160gf C:260gf |
| Height | H:0.55 |
| | |
| | |



CIRCUIT DIAGRAM

| ⑤ | Terminal | — | 4 | Brass (0.30t) | Plating silvering | —— |
|------|-----------|--------|-----|---------------|-------------------|--------|
| ④ | Contact | — | 1 | F.ag/Sus | Natural | —— |
| ③ | Base | — | 1 | Lcp | | —— |
| ② | Cover | — | 1 | kapton filmPI | Plating Nickel | —— |
| ① | Keystake | — | 1 | | | —— |
| ITEM | PAPT NAMF | TER,NO | QTY | MATERIAL | FINISHING | REMARK |

| | | | | | | | | | | | | | |
|---|-------------|------|---------|----------|------------------------|--------------------------------------|--|------|--|-------------|----------------------------|-------|----------|
| | | | | | units: mm | DSND | | DATE | | SCALE: N/A | MODEL TYPE: TACT SWITCH | | |
| | | | | | tolerance: | DWN | | DATE | | VIEW: | PART NO.: | | |
| ΔX | | | | | X.X ±0.2mm | CHKD | | DATE | | UNIT: mm/in | DWG NO.: TS-1824SR-X | | |
| ΔX | | | | | X.XX ±0.1mm | APPD | | DATE | | SIZE: A4 | | | |
| ΔX | | | | | X.XXX ±0.05mm | | | | | | WEIGHT | SHEET | REVISION |
| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES | XKB INDUSTRIAL PRECISION CO.,LIMITED | | | | | 1.0g | 1/1 | A0 |
| REVISIONS | | | | | | | | | | | | | |
| www.xk-dg.cn www.helloxkb.com www.helloxkb.cn | | | | | | | | | | | | | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)