




RECOMMENDED P.C.B. LAYOUT

Specifications

Rating: DC 12V/50mA
 Contact Resistance: 500mΩ max
 Insulation resistance: DC100V 60S 100MΩ min
 Dielectric strength: AC250V(50~60HZ)60S min
 Operation force: 160±30gf 180±30gf 240±50gf
 Operating Life: 300,000cycles 100,000cycles
 Travels: 0.13±0.05mm

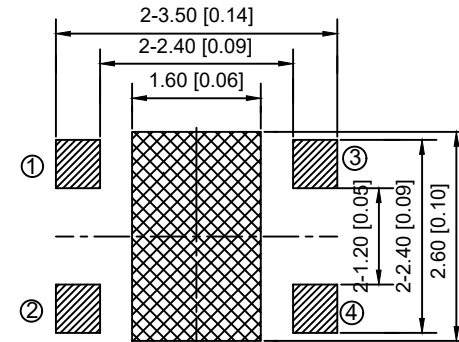

LAND PATTERN PLAN

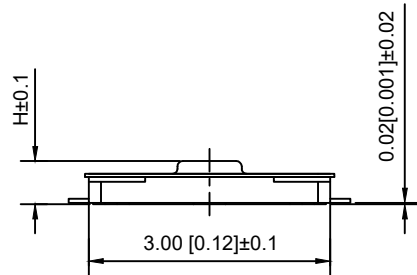

CIRCUIT DIAGRAM

| | |
|-----------------|-----------------|
| PAPT NO | TS-2630-X |
| Operating Force | B:160gf C:260gf |
| Height | H:0.65 |

| ITEM | PART NAME | QUANTITY | MATERIAL | FINISH |
|------|-----------|----------|-----------------|-----------|
| 5 | KNOB | 1 | POLYAMIDE | BLACK |
| 4 | FILM | 1 | POLYAMIDE | WHITE |
| 3 | DOME | 2 | STAINLESS STEEL | Ag-PLATED |
| 2 | HOUSING | 1 | POLYAMIDE | BLACK |
| 1 | TERMINAL | 1 | PHOSPHOR BRONZE | Ag-PLATED |

| | | | |
|---------------------------------------|------|-------------|--------------------|
| DSND | DATE | SCALE: N/A | MODEL TYPE: |
| DWN | DATE | VIEW: | TACT SWITCH |
| CHKD | DATE | UNIT: mm/in | PART NO.: |
| APPD | DATE | SIZE: A4 | DWG NO.: TS-2630-X |
| XKB INDUSTRIAL PRECISION CO., LIMITED | | | WEIGHT: 1.0g |
| | | | SHEET: 1/1 |
| | | | REVISION: A0 |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|------|-------------|------|---------|----------|------------------------|
| ΔX | | | | | units: mm |
| ΔX | | | | | tolerance: X.X ±0.2mm |
| ΔX | | | | | X.XX ±0.1mm |
| MARK | | | | | X.XXX ±0.05mm |

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)