
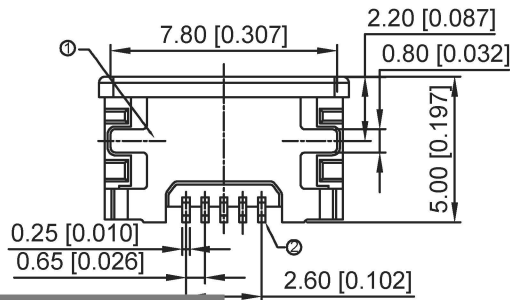


Recommended PCB Layout
(General Tolerance:±0.05)

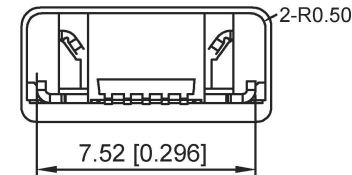

ITEM	PAPT NAME	QTY	MATERIAL	FINISHING
①	Shell	1	Stainless Steel	
②	Terminal	5	Copper Alloy	
③	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

- 1.Contact Resistance:30m0HM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:1000M OHM Min.;
- 4.Mating And Unmating Force:
Mating Force:35N Max/Unmating Force:8N Min;
- 5.Durability:10000 Cycles;

广东星坤科技股份有限公司

生效日期

MARK	DESCRIPTION	DATE	REVISED	APPROVED	REVISIONS

文件工程章

www.helloxkb.com www.helloxkb.com www.helloxkb.com

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	MICRO USB
CHKD	DATE	UNIT: mm/in	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
KXB INDUSTRIAL PRECISION CO., LIMITED			U-E-M5SS-Y-5
WEIGHT	SHEET	REVISION	
1.0g	1/1	A0	

AUTODESK

AUTODESK

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)