
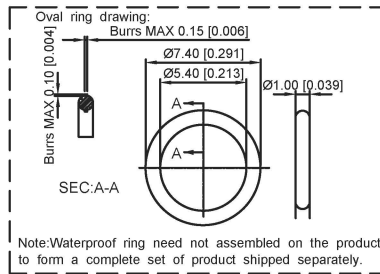


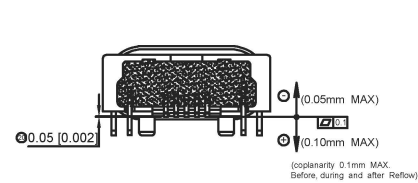



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
    - RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)
    - CONTACT RESISTANCE: 30mΩ MAX. 7mΩ (A/L)
    - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE
    - INSULATION RESISTANCE: 100M Ω MIN. MEASURED BY 500 VDC
  - MECHANICAL CHARACTERISTICS:
    - INSERTION FORCE: 3.6 KGF (MAX)
    - WITHDRAWAL FORCE: 0.8 KCF (Reference)
    - DURABILITY: 10,000 CYCLES
    - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7(1m, 30min)
  - PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
  - OVALE RING
    - The amount of low molecular siloxanes(D3-010) is less than 200ppm
    - Hardness of silicone rubber: 70°
  - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
  - PACKAGING: TAPE & REEL.

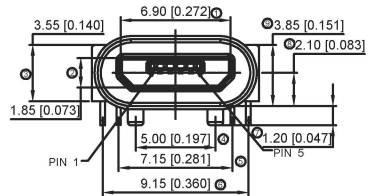

④	Contact	5	C18140H T=0.20	
③	Shell	1	SUS304 T=0.25	Nickel
②	Terminal	2	C2680 T=0.3	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AUTODESK

AUTODESK

广东星坤科技股份有限公司

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

生效日期

文件工程章

REVISIONS

www.helloxkb.com www.helloxkb.com www.helloxkb.com

ANGLAR ±5°  
L ≤ 4 ±0.2  
4 < L ≤ 16 ±0.3  
16 < L ≤ 63 ±0.4  
L > 63 ±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: USB 3.0
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	U-E-M7SS-Y-1
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)