




XKB Connectivity

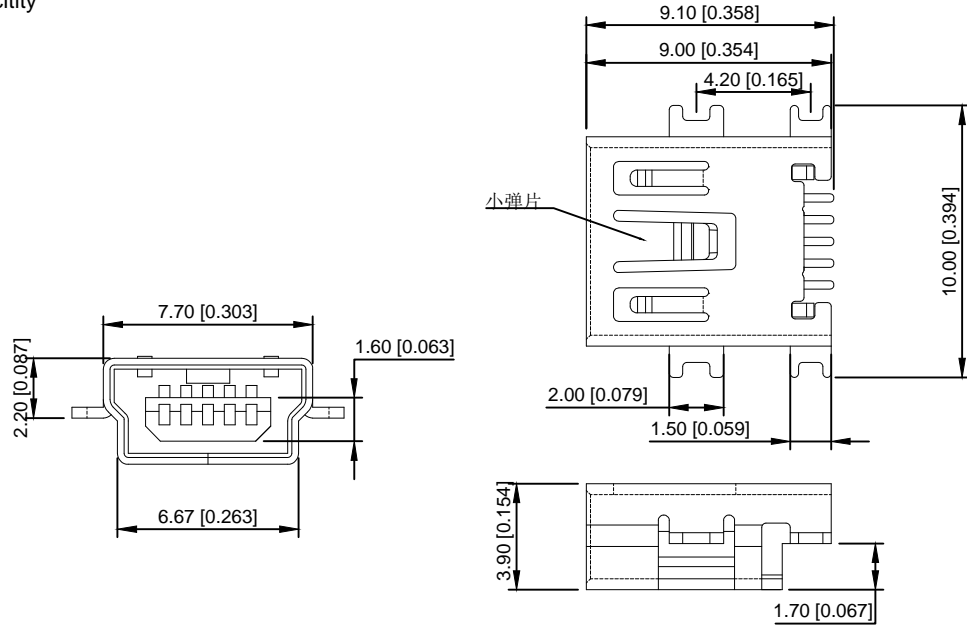

XKB Connectivity

NOTES:

- 1.ELECTRICAL
 - 1) VOLTAGE CURRENT RATING:10AMP30VAC
 - 2)INSULATION RESISTANCE:100M MINI
 - 3)CONTACT RESISTANCE50mQ MAXE
 - 4)WITHSTANDING VOLTAGE300VAC
 - 5)OPERATING TEMPERATURE-55CT0+85C
- 2.Mechanical
 - 1)Mating Forcer30N MAX
 - 2)Unmating Force 7N MIN.
- 3.DIMENSIONSMARKED""TO BE CHECKEDBYQC&IPQC
- 4.PART NO.

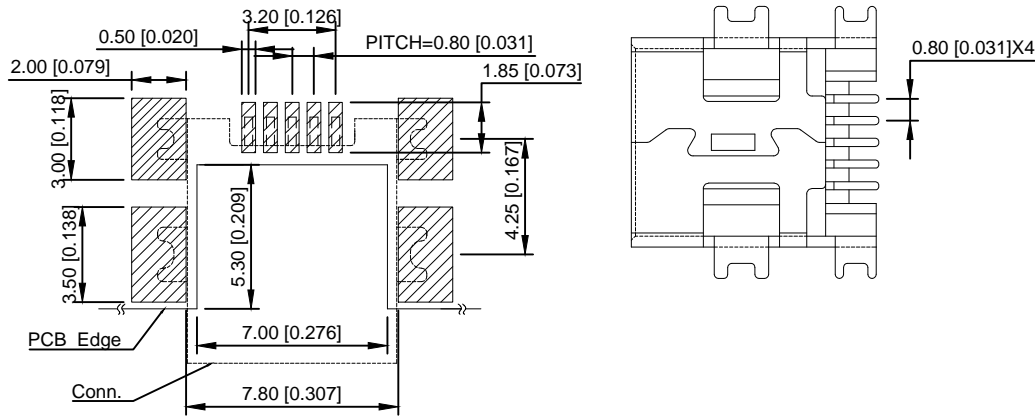

P.C.B LAYOUT

XKB Connectivity

XKB Connectivity

U213-05XN-4BH84

G:GREEN
B:BLACK
BL:BLUE

1: Au 1U"
5: Au 15U"
6: Au 30U"

1: PBT
2: PA6T
3: PA9T
4: LCP

					DSND		DATE		SCALE: N/A	MODEL TYPE: MINI USB		
					ANGLAR	±5°	DWN	DATE	VIEW:	PART NO.:		
Δx					L ≤ 4	±0.2	CHKD	DATE	UNIT: mm/in	DWG NO.:		
Δx					4 < L ≤ 16	±0.3	APPD	DATE	SIZE: A4	U213-05XN-4BH84		
Δx					16 < L ≤ 63	±0.4				WEIGHT	SHEET	REVISION
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5	XKB INDUSTRIAL PRECISION CO.,LIMITED			1.0g	1/1	A0
REVISIONS					UNSPECIFIED TOLERANCES							
www.xk-dg.cn www.helloxkb.com www.helloxkb.com												

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)