


RECOMMENDED PCB LAYOUT

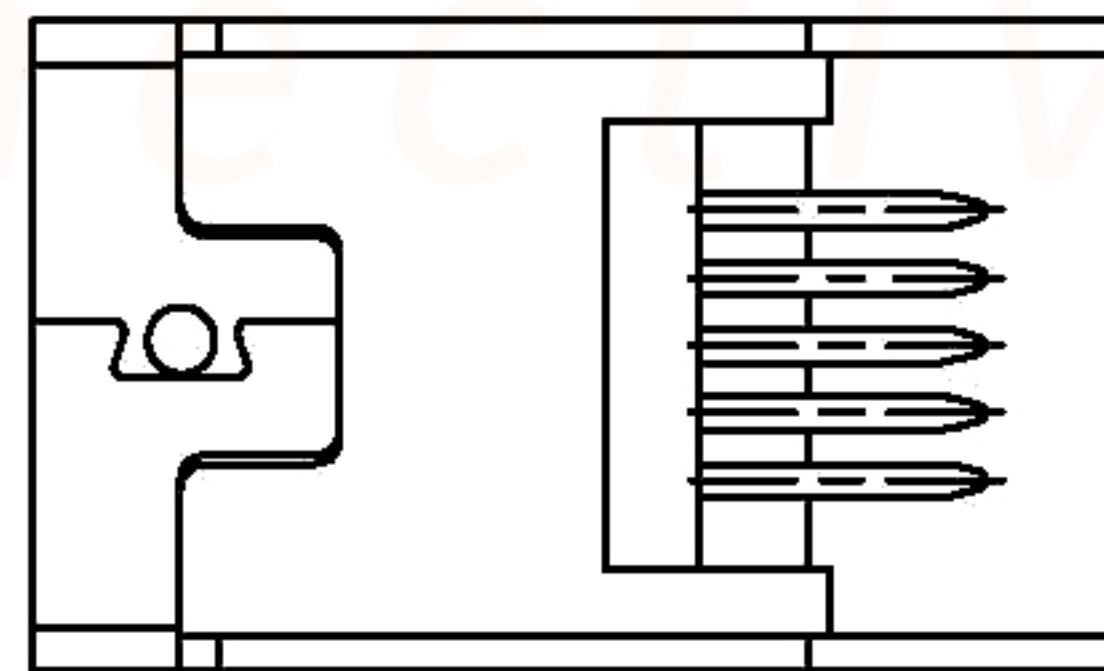

Material
 Housing Material: LCP, UL94V-0, black
 Contact Terminal: Phosphor bronze, T=0.25mm
 Metallic Shell: Brass, T=0.4mm
 Plating
 Contact Terminal
 Underplating: Nickel all over
 Contact Plating: 1μ" gold
 Solder Tail: Bright Tin
 Metallic Shell
 Underplating: Nickel 50μ" all over
 Metallic Shell: Matte Tin 50μ" all over
 Electrical
 Voltage Rating: 30VDC
 Current Rating: 1A
 Contact Resistance: 50mΩ Max
 Insulation resistance: 100MΩ Min (Apply 100 VDC)
 Dielectric withstanding voltage: No discharge or flash (100V AC is applied for 1 minute)
 Mechanical
 Durability: 5,000 cycles
 Mating Force: 35N (3.57Kgf) Max
 Unmating Force: Initial - 7N (0.71KgF) Min., 5001st cycle - 3N (0.31KgF) Min.
 Environmental and Processing
 Operating Temperature: -50°C to +85°C

U215-05XN-4BP81

1: Au 1U"
 6: Au 30U"

DSND		DATE		SCALE: N/A	MODEL TYPE: MINI USB
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	U215-05XN-4BP81
UNSPECIFIED TOLERANCES					WEIGHT
XKB INDUSTRIAL PRECISION CO., LIMITED					SHEET
					REVISION
					1.0g
					1/1
					A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)