
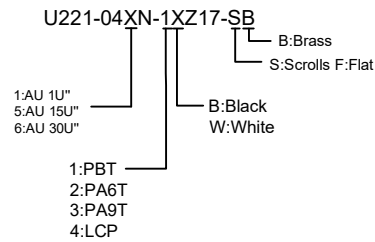


P.C.B LAYOUT
BOTTOM VIEW

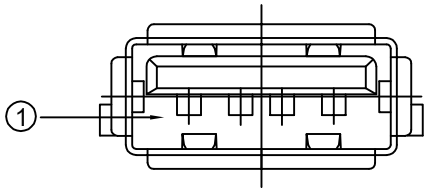

NOTE:

- 1.1 Contact resistance: 30 MΩ Max
- 1.2 Insulation resistance: 1000 MΩ Min
- 1.3 Dielectnic voltage: 500V AC one sec levelin
- 1.4 Operating temperature:-55°C~-105°C
- 1.5 Total mating force: 3.5 Kgf Max.
- 1.6 Total unmating force: 1.0 Kgf Min.
- 1.7 Major DIM: △

3	SHELL	C2680/Fe	T=0.30	Cu 50U"@Ni 50U"	1
2	TERMINAL	C5191	T=0.25	Sn 100U"+ Au 1u"-30U"	4
1	HOUSING	PBT	—	WHITE/BLACK UL94-V0	1
NO.	PART NAME	MATERIAL	THICK	FINISH	Q'TY

ΔX						ANGLAR	±5°	
ΔX						L ≤ 4	±0.2	
ΔX						4 < L ≤ 16	±0.3	
MARK	DESCRIPTION	DATE	REVISED	APPROVED		16 < L ≤ 63	±0.4	
						L > 63	±0.5	
REVISIONS							UNSPECIFIED TOLERANCES	
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn								

DSND		DATE		SCALE: N/A	MODEL TYPE: USB 2.0	
DWN		DATE		VIEW:	PART NO.:	
CHKD		DATE		UNIT: mm/in	DWG NO.:	
APPD		DATE		SIZE: A4	U221-04XN-1XZ17-SB	
KKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
				1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)