


P.C.B LAYOUT  
BOTTOM VIEW

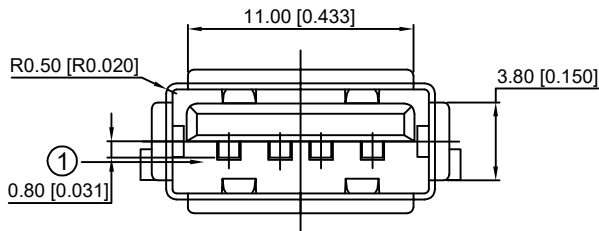

- U221-04XN-1XZ19-SB
- B: Brass
  - S: Scrolls F: Flat
  - 1: AU 10"
  - 5: AU 15"
  - 6: AU 30"
  - B: Black
  - W: White
  - 1: PBT
  - 2: PA6T
  - 3: PA9T
  - 4: LCP

**SPECIFICATIONS:**

Contact current Rating: 1 Amperes.  
 DIELECTRIC Withstanding Voltage: AC 500V.  
 Insulation resistance: 1000MΩ Minimum.  
 Contact Resistance: 30mΩ Maximum.  
 operating Temperature: -55°C to +85°C.

**MECHANICAL CHARACTERISTICS:**

Mating Force: 3.5Kg. Maximum.  
 Unmating Force: 1kg. Minimum.  
 durability: 1500 cycles.

Major DIM: Δ

NO.	PART NAME	MATERIAL	THICK	FINISH	Q'TY
3	SHELL	C2680	T=0.30	Cu 50U"@Ni 50U"	1
2	TERMINAL	C5191	T=0.25	Sn 100U"+ Au 1u"-30U"	4
1	HOUSING	PBT	—	WHITE/BLACK UL94-V0	1

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

DSND	DATE	SCALE: N/A	MODEL TYPE: USB 2.0
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	U221-04XN-1XZ19-SB
KXB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)