


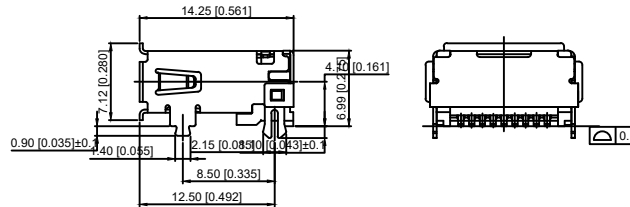
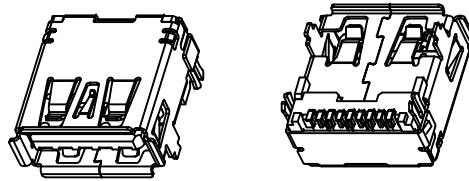



S:Scrolls



RECOMMENDED P.C.B. LAYOUT (COMPONENT SIDE)
 DEFAULT TOLERANCES:±0.05;PCB THICKNESS:1.2mm




F:Flat

Material
 Housing Material: LCP, UL94V-0, blue
 Contact Terminal: Copper Alloy
 Metallic Shell:SUS
 Plating
 Underplating: Nickel
 Contact Plating: 1μ" Gold
 Solder Tail: 100μ" Min. Tin
 Metallic Shell: Nickel

Electrical
 Voltage Rating: 100 V AC
 Current Rating: 0.25A (Signal pins 2,3,5,6,7,8,9) 1.8A (Power Pins 1,4)
 Contact Resistance: 30mΩ Max.
 Insulation resistance: 1000MΩ Min.
 Dielectric withstanding voltage: 100V AC/Minute

Mechanical
 Durability: 1500 cycles
 Mating Force: 35N (3.57Kgf) Max
 Unmating Force: 10N (1.02Kgf) Min. initial, 8N min after test
 Environmental and Processing
 Operating Temperature: -40°C to +85°C

U231-09XN-4BLFA00-XS

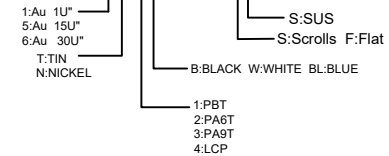

						ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: USB 3.0
Δx						L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.:
Δx						4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm/in	DWG NO.:
Δx						16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	U231-09XN-4BLFA00-XS
MARK		DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5						WEIGHT
		REVISIONS				UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				SHEET	REVISION
		www.xk-dg.cn	www.helloxkb.com	www.helloxkb.cn									1.0g
													1/1
													A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)