
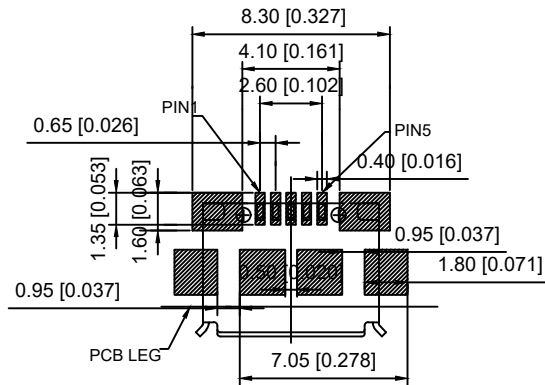
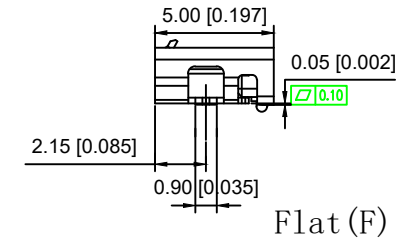


Scrolls (S)

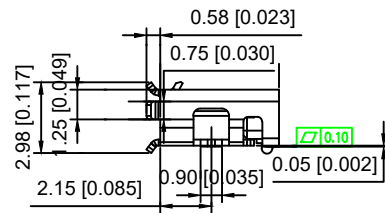

Material
 Housing Material: LCP, UL94V-0, black
 Contact Terminal: Copper Alloy
 Metallic Shell: Sus
 Electrical
 Voltage Rating: 30 V AC
 Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A
 Contact Resistance: 30mΩ Max
 Insulation resistance: 1000MΩ Min
 Dielectric withstanding voltage: 250V AC/Minute
 Mechanical
 Durability: 10,000 cycles
 Mating Force: 35N (3.57Kgf) Max
 Unmating Force: 8N (0.82Kgf) Min.

U253-05XX-4BH89-XXS
 1:AU 1U"
 6:AU 30U"
 T:TIN
 N:NICKEL
 S:Sus
 1:WITH 2:WITHOUT
 S:Scrolls F:Flat

						DSND		DATE		SCALE: N/A	MODEL TYPE: MICRO USB		
ΔX						DWN		DATE		VIEW:	PART NO.:		
Δx						CHKD		DATE		UNIT: mm/in	DWG NO.:		
MARK	DESCRIPTION	DATE	REVISED	APPROVED		APPD		DATE		SIZE: A4	U253-05XX-4BH89-XXS		
REVISIONS					UNSPECIFIED TOLERANCES	XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g	SHEET 1/1	REVISION A0

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)