

RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

**Material**

Housing Material: LCP, UL94V-0, black

Contact Terminal: Copper Alloy

Metallic Shell: Sus

**Electrical**

Voltage Rating: 30 V AC

Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A

Contact Resistance: 30mΩ Max

Insulation resistance: 1000MΩ Min



Dielectric withstanding voltage: 250V AC/Minute

**Mechanical**

Durability: 10,000 cycles

Mating Force: 35N (3.57Kg) Max

Unmating Force: 8N (0.82Kg) Min.

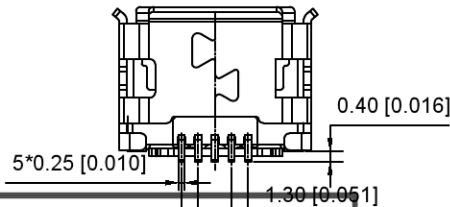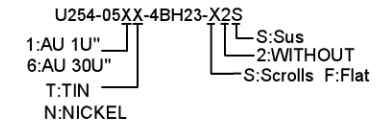

广东星坤科技股份有限公司

生		日期
发		

ΔX	REVISIONS	DATE	REVISED	APPROVED
MARK	UNSPECIFIED TOLERANCES			

www.xkcg.cn www.helloxkb.com www.helloxkb.cn

DSND		DATE		SCALE: N/A	MODEL TYPE: MICRO USB
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	U254-05XX-4BH23-S2S
				WEIGHT	SHEET
KXB INDUSTRIAL PRECISION CO., LIMITED				1.0g	1/1
				REVISION	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)