

PIN DEFINITION			
PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	VBUS	B9	VBUS
A5	CC	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	VCONN
A9	VBUS	B4	VBUS
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND

NOTES:

1.MATERIALI:

CONTACTS: Copper alloy T=0.15
INSULATOR: HIGH TEMPERATURE PLASTIC
 UL 94V-0,






Shell: STEEL T=0.15

2.ELECTRICAL PERFORMANCE:

INSULATION RESISTANCE: 100Mohm MIN.
CONTACT RESISTANCE: 40mohm MAX.
DIELECTRIC WITHSTANDING: 100 VAC
CURRENT RATING: 5A MIN.

3.MECHANICAL PERFORMANCE:

MATING FORCE: 5~20N
UNMATING FORCE: 8~20N
DURABILITY: 10000 CYCLES

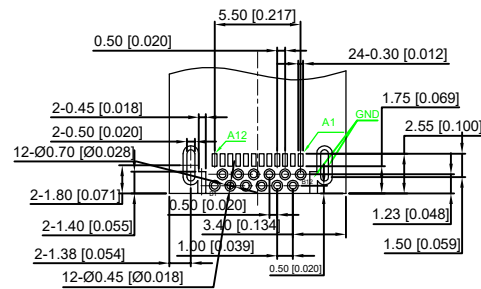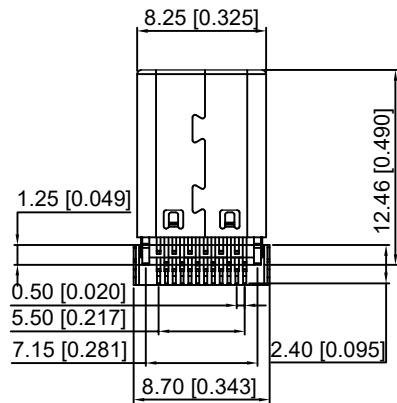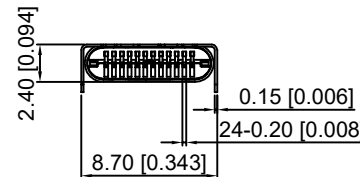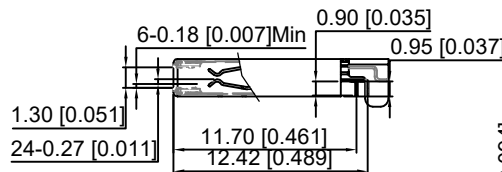

Recommended P.C.B Layout
Tolerance ±0.05

U261-24XN-4BC2LS

- 1: Au 1U" MIN
- 2: Au 15U" MIN
- 3: Au 30U" MIN

- 1:WITH
- 2:WITHOUT
- B:BLACK
- U:BLUE
- W:WHITE
- C:CREAM-COLOR
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

					DSND		DATE		SCALE: N/A	MODEL TYPE: TypeC 3.1		
					DWN		DATE		VIEW:	PART NO.:		
					CHKD		DATE		UNIT: mm/in	DWG NO.:		
					APPD		DATE		SIZE: A4	U261-24XN-4BC2LS		
					UNSPECIFIED TOLERANCES					WEIGHT	SHEET	REVISION
										KXB INDUSTRIAL PRECISION CO.,LIMITED		

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGULAR	±5°
ΔX					L ≤ 4	±0.2
ΔX					4 < L ≤ 16	±0.3
ΔX					16 < L ≤ 63	±0.4
					L > 63	±0.5

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)