

SPECIFICATION:

1. Material

Housing Material:High temperature thermoplastic
 Contact Terminal:High Grade Copper Alloy
 Merallic Shell:Stainless Steel
 Inner Ground Cover Shell:Stainless Steel
 Mid Plate:Stainless Steel

2. Mechanical:

2.1.Mating force:5-20Nf;
 2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
 2.3.Durability:5000 Cycles;


3. Electrical:

3.1.Current Rating:3A
 3.2.Voltage Rating:20V Max.;;
 3.3.Dielectric Withstanding
 volage:100Vac,60S,10mA;
 3.4.Contact resistance:40m Ohms Max.;;
 3.5.Insulation Resistance:100M Ohms Min.;;

4. Environmental:

4.1.Operating temperature:-40°C~+85°C;
 4.2.Salt Spray Test:24H Min.(No oxidation or rust);

U262-16XN-4BC20865

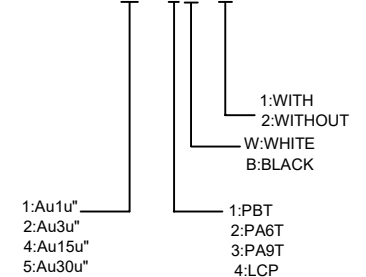

					DSND		DATE		SCALE: N/A	MODEL TYPE: 3.1 TYPE C		
					DWN		DATE		VIEW:	PART NO.:		
					CHKD		DATE		UNIT: mm/in	DWG NO.:		
					APPD		DATE		SIZE: A4	U262-16XN-4BC20865		
					UNSPECIFIED TOLERANCES					WEIGHT	SHEET	REVISION
					KXB INDUSTRIAL PRECISION CO.,LIMITED					1.0g	1/1	A0

Δx					ANGULAR	±5°
Δx					L ≤ 4	±0.2
Δx					4 < L ≤ 16	±0.3
Δx					16 < L ≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS						
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn						

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)