



RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

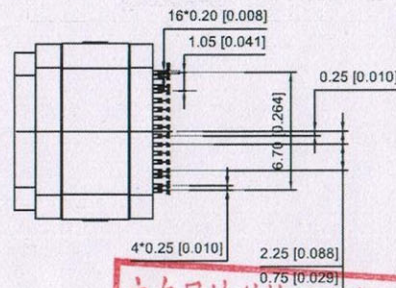

Material  
Housing Material: High temperature thermoplastic. UL94V-0, Black  
Contact Terminal: Copper Alloy  
Metallic Shell: Stainless Steel  
Inner Ground Cover Shell: Stainless Steel  
Plating  
Data Contact  
Underplating: 50µm Min. Nickel  
Contact Plating: Gold Flash  
Solder Area: 80µm Matte Tin  
Shell  
Metallic Shell: 50µm Min. Nickel  
Electrical  
Voltage Rating: 20V DC  
Current Rating: Vbus pins collectively 3.00A, GND pins collectively 4.25A, B5 pin 1.25A, Other pins 0.25A per pin  
Contact Resistance: 40mΩ Max Initial 50mΩ Max after test  
Insulation resistance: 100 MΩ min.  
Dielectric withstanding voltage: 100V AC/Minute  
Mechanical  
Durability: 10,000 cycles  
Mating Force: 5 to 20N  
Unmating Force: 8 to 20N after test  
Environmental and Processing  
Operating Temperature: -30°C to +85°C

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SNU2
A6	DP1	A7	DN2
A7	DN1	A6	DP2
A8	SBU1	A5	CC2
A9	VBUS	A4	VBUS
A12	GND	A1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

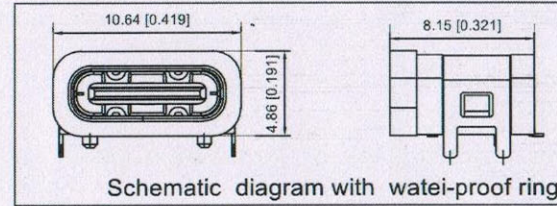

U262-16XN-4BFC10

- 1:AU 0.8U"
- 2:AU 5U"
- 3:AU 10U"
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

广东星坤科技股份有限公司  
集  
文件  
工程

DSND	DATE	SCALE: N/A	MODEL TYPE: 3.1 TYPE C
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	U262-16XN-4BFC10
REVISIONS		WEIGHT	SHEET
MARK	DESCRIPTION	1.0g	1/1
DATE	REVISED	APPROVED	REVISION
			A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)