
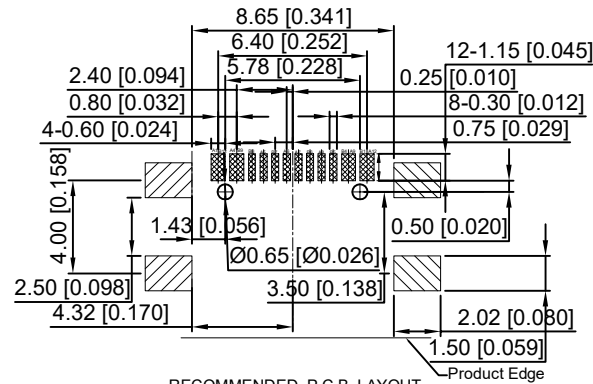






**SPECIFICATION:**


1. Material
    - Housing Material:High temperature thermoplastic
    - Contact Terminal:High Grade Copper Alloy
    - Metallic Shell:Stainless Steel
    - Inner Ground Cover Shell:Stainless Steel
    - Mid Plate:Stainless Steel
  2. Mechanical:
    - 2.1.Mating force:5-20Nf;
    - 2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
    - 2.3.Durability:5000 Cycles;
  3. Electrical:
    - 3.1.Current Rating:3A
    - 3.2.Voltage Rating:20V Max.;
    - 3.3.Dielectric Withstanding
- volage: 100Vac,60S,10mA;
- 3.4.Contact resistance:40m Ohms Max.;
  - 3.5.Insulation Resistance:100M Ohms Min.;
- 4.Environmental:
  - 4.1.Operating temperature:-40°C~+85°C;
  - 4.2.Salt Spray Test:24H Min.(No oxidation or rust);

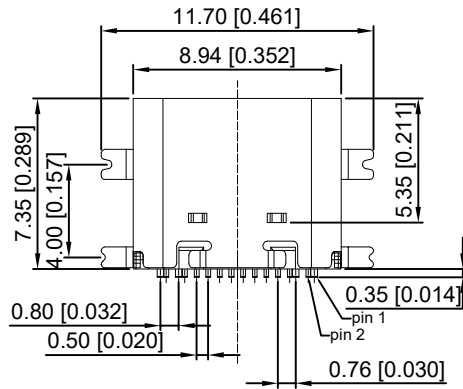

RECOMMENDED P.C.B LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

**U262-16XN-4BS1735**

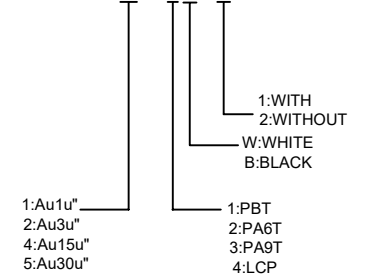

REVISIONS					ANGLAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE:		
Δx					L ≤ 4	±0.2	DWN	DATE	VIEW:	3.1 TYPE C		
Δx					4 < L ≤ 16	±0.3	CHKD	DATE	UNIT: mm/in	PART NO.:		
Δx					16 < L ≤ 63	±0.4	APPD	DATE	SIZE: A4	DWG NO.:		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5				U262-16XN-4BS1735		
					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn										1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)