


RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATION:

1. Material
 - Housing Material:High temperature thermoplastic
 - Contact Terminal:High Grade Copper Alloy
 - Metallic Shell:Stainless Steel
 - Inner Ground Cover Shell:Stainless Steel
 - Mid Plate:Stainless Steel
2. Mechanical:
 - 2.1.Mating force:5-20Nf;
 - 2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
 - 2.3.Durability:10000 Cycles;
3. Electrical:
 - 3.1.Current Rating:3A
 - 3.2.Voltage Rating:20V Max.;
 - 3.3.Dielectric Withstanding volage:100Vac,60S,10mA;
 - 3.4.Contact resistance:40m Ohms Max.;
 - 3.5.Insulation Resistance:100M Ohms Min.;
4. Environmental:
 - 4.1.Operating temperature:-30°C~+80°C;
 - 4.2.Salt Spray Test:24H Min.(No oxidation or rust);

U262-24XN-4BJ2105

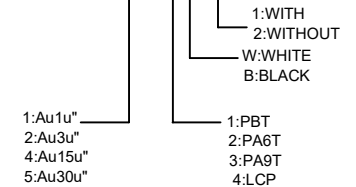

					DSND		DATE		SCALE: N/A	MODEL TYPE: 3.1 TYPE C
					ANGLAR	±5°	DWN		VIEW:	PART NO.:
					$L \leq 4$	±0.2	CHKD		UNIT: mm/in	DWG NO.:
					$4 < L \leq 16$	±0.3	APPD		SIZE: A4	U262-24XN-4BJ2105
					$16 < L \leq 63$	±0.4				
					$L > 63$	±0.5				
REVISIONS					UNSPECIFIED TOLERANCES					
MARK	DESCRIPTION	DATE	REVISED	APPROVED	XKB INDUSTRIAL PRECISION CO.,LIMITED					
www.xk-dg.cn		www.helloxkb.com		www.helloxkb.cn		WEIGHT	SHEET	REVISION		
						1.0g	1/1	A0		

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)