XKB Connecitity

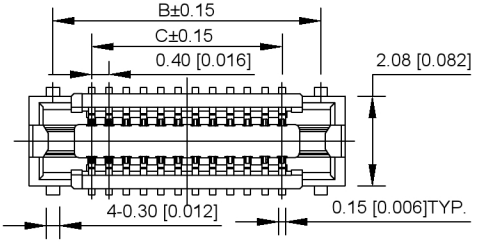





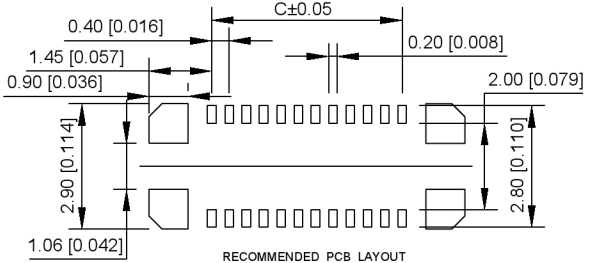

RECOMMENDED PCB LAYOUT

CONNECTOR SIDE

XKB Connecitity

XKB Connecitity

规格 SPECIFICATIONS:

1.电压/电流额定值 VOLTAGE/CURRENT RATING: 30V/0.3A AC;
2.耐电压 WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
3.绝缘电阻 INSULATION RESISTANCE: 50MΩ MIN;
4.接触电阻 CONTACT RESISTANCE: 100mΩ MAX;
5.工作温度范围OPERATING TEMPERATURE RANGE: -35°C TO 85°C.

材料 MATERIAL:

1.绝缘材料 INSULATOR: LCP UL 94V-0 BLACK;
2.端子 TERMINAL: COPPER ALLOY;
3.金属配件 METAL FITTINGS: COPPER ALLOY.

镀层 PLATING:

1.端子 TERMINAL: GOLD PLATING,
NICKEL 50u" MIN. OVER ALL;
2.金属配件 METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.

X0400 F V S -XX S -LP SN
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No
② Weld in g Board Angle : F-Female
③ Weld in g Board Angle : V-180° R-90°
④ Welding Way:S-SMT
⑤ Row No.-Pin No.: XX-Single Row
⑥ S: With positioning column , Null: No positioning column
⑦ Material: LP-LCP 94V-2
⑧ Plating Category: SN-Bright Tin Plating (70-120u")

XKB Connecitity

PIN NO.	A	B	C
10	4.5	3.4	1.6
12	4.9	3.8	2.0
16	5.7	4.6	2.8
20	6.5	5.4	3.6
24	7.3	6.2	4.4
30	8.5	7.4	5.6
34	9.3	8.2	6.4
40	10.5	9.4	7.6
50	12.5	11.4	9.6

广东星坤科技股份有限公司
生效 日期
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED

REVISIONS

www.xkcg.cn www.helloxkb.com www.helloxkb.cn

ANGLAR	±5°
L≤4	±0.2
4<L≤16	±0.3
16<L≤63	±0.4
L>63	±0.5

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm/in
APPD		DATE		SIZE: A4

XKB INDUSTRIAL PRECISION CO.,LIMITED

MODEL TYPE: BTB CONNECTOR

PART NO.:

DWG NO.: X0400FVS-XX-LPSN

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>XKB Connectivity(中国星坤)

Downloaded From Oneyac.com