




SECTION: B-B



SECTION: A-A

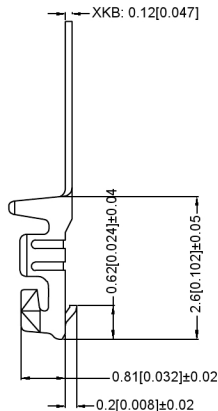

Specifications:

规格:

Voltage rating: 30V AC/DC  
 额定电压: 30V AC/DC  
 Current rating: 0.5A AC/DC  
 额定电流: 0.5A AC/DC  
 Withstanding voltage: 200V AC/minute  
 耐压电压: 200V AC/分钟  
 Temperature range: -25°C ~ +85°C  
 温度范围: -25°C ~ +85°C  
 Insulation resistance: ≥100MΩ  
 绝缘电阻: ≥100MΩ  
 Contact resistance: ≤20mΩ  
 接触电阻: ≤20mΩ  
 After environment testing: ≤40mΩ  
 环境试验后: ≤40mΩ

X0800 T-P XX X

① ② ③ ④

① Series Number

② Category: T-terminal

③ Material: P-Phosper bronze

⑦ SN-Bright Ni: 30-50u " SN: 70-120U"

V01 -All Gold Flash

X0800T-PSN	High conductive Brass	AWG# 32-36	0.39mm (Max)	Phosphor Bronze	Tin-Plated	X0800W
X0800T-PV01						
PART NO	Material	Wire Range	Insulation O.D.	Material (Terminal)	Finish (Terminal)	Suitable XKB Terminal

广东星坤科技股份有限公司

生 日期

文件工程章

REVISIONS

DATE REVISED APPROVED

UNSPECIFIED TOLERANCES

ANGULAR ±5°  
 L ≤ 4 ±0.2  
 4 < L ≤ 16 ±0.3  
 16 < L ≤ 63 ±0.4  
 L > 63 ±0.5

DSND	DATE	SCALE: N/A	MODEL TYPE: X1259HV-XX-No
DWNN	DATE	VIEW: ①	PART NO.: 0.80mm IDC Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
VXP INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)