






X1259 HV-XX X- N0 XX

① ②③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-ordinary
- ④ Row No.-Pin No.: XX-Single Row
- ⑤ Plug the Pin & Special No.: Blank-Ordinary
- ⑥ Material : N0-PA66 94V-0
- ⑦ Color: Blank : Natural Color ; RE- Red

Specifications:

规格:
 Voltage rating: 50V AC/DC
 额定电压: 50V AC/DC
 Current rating: 1A AC / DC
 额定电流: 1A AC / DC
 Withstanding voltage: 250V AC/minute
 耐压电压: 250V AC/minute
 Temperature range:-25℃~+85℃
 温度范围: -25℃~+85℃
 Insulation resistance: ≥100MΩ
 绝缘电阻: ≥100MΩ
 Contact resistance: ≤10mΩ
 接触电阻: ≤10mΩ
 After environmental testing: ≤20mΩ
 环境测试后: ≤20mΩ

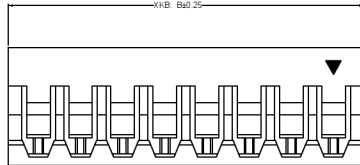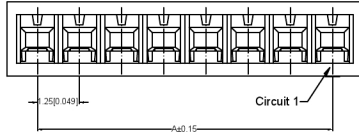

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	1.25	3.05	9	10.00	11.80
3	2.50	4.30	10	11.25	13.05
4	3.75	5.55	11	12.50	14.30
5	5.00	6.80	12	13.75	15.55
6	6.25	8.05	13	15.00	16.80
7	7.50	9.30	14	16.25	18.05
8	8.75	10.55	15	17.50	19.30

X1259HV-XX-N0	Nylon 66 UL 94V-0	1259BT
PART NO	Material	Suitable XKB Terminal

广东星坤科技股份有限公司

生	日期
發	
Δ	
文件工程	章

REVISIONS

DATE	REVISED	APPROVED

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	1.25mm Board In Connectors
APPD	DATE	SIZE: A4	DWG NO.:
			X1259HV-XX-N0
INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
			1.0g
			SHEET
			1/1
			REVISION
			A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)